RNAV (RNP) Z RWY 22

LAGUARDIA (LGA)

APP CRS	Rwy Ldg	7002
224°	TDZE	12
	Apt Elev	21

RNP AR APCH - GPS. RF required.

NA For uncompensated Baro-VNAV systems, procedure NA below -11°C or above 54°C. For inop ALS, increase RNP 0.30 DA* visibility to RVR 5500.

ALSF-1

MISSED APPROACH: Climb to 3000 direct PROUD and hold, continue climb-in-hold to 3000. *Missed approach requires minimum climb of 397 feet per NM to 560.

D-ATIS	NEW YORK APP CON	LAGUARDIA TOWER	GND CON
125.95	120.8 322.35	118.7 322.35	121.7 322.35

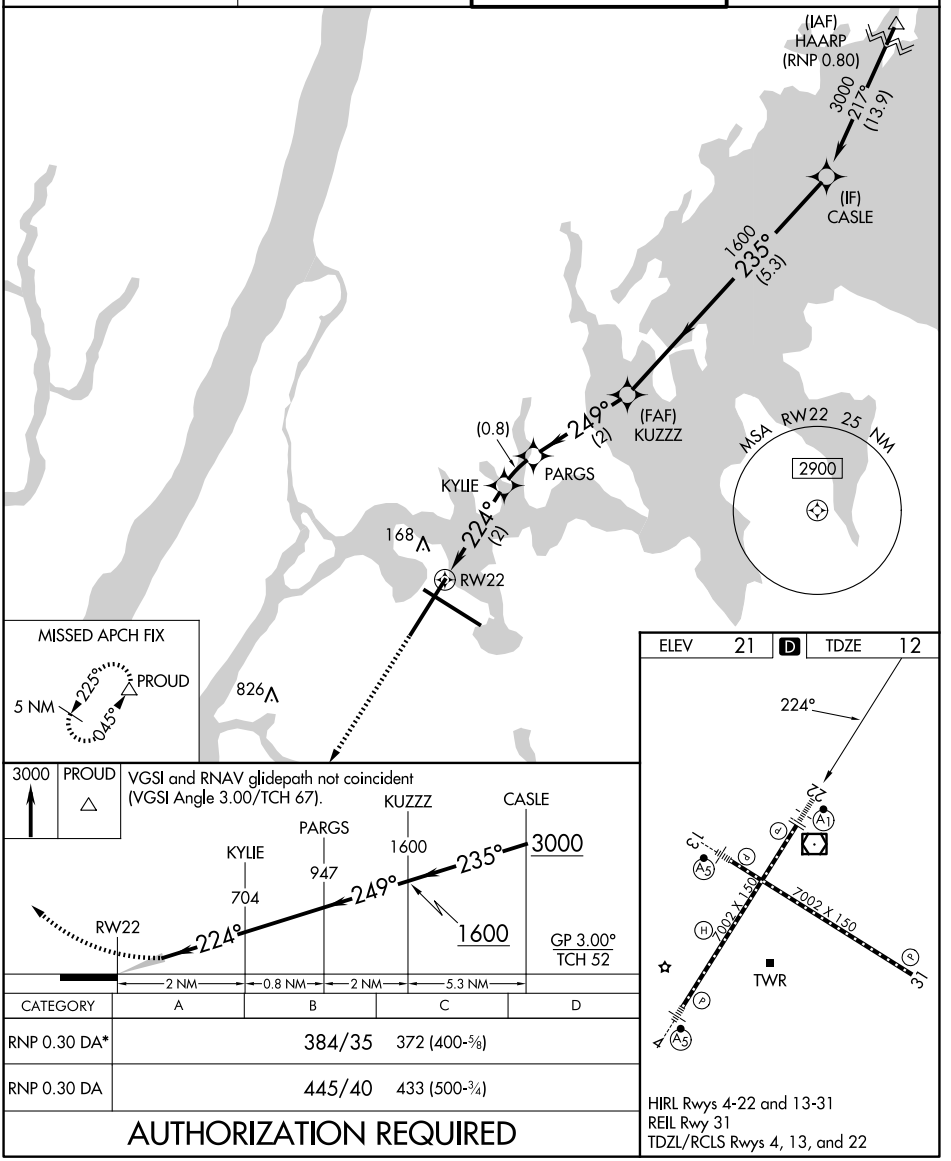

CATEGORY	A	B	C	D
RNP 0.30 DA*	384/35	372 (400-⅝)		
RNP 0.30 DA	445/40	433 (500-¾)		

AUTHORIZATION REQUIRED

NE-2, 03 SEP 2026 to 01 OCT 2026
NE-2, 03 SEP 2026 to 01 OCT 2026