

WAAS CH 81807 W36A	APP CRS 356°	Rwy Ldg TDZE Apt Elev 7339 1066 1087
--	------------------------	---

RNAV (GPS) RWY 36

NEW CENTURY AIRCENTER (IXD)

RNP APCH - GPS

▼


▲

For inop ALS, increase LNAV Cat C visibility to 1 SM. Inop table does not apply to LNAV Cat D. When local altimeter setting not received, use OJC altimeter setting: increase LPV DA to 1335 feet; increase all MDAs 20 feet. VDP NA when using OJC altimeter setting.


MALS R

MISSED APPROACH:
Climb to 3100 direct ZODPU and hold.

ASOS 135.325	KANSAS CITY APP CON 118.9 251.075	NEW CENTURY TOWER ★ 133.0 (CTAF) 0	GND CON 124.3	UNICOM 122.95
------------------------	---	--	-------------------------	-------------------------

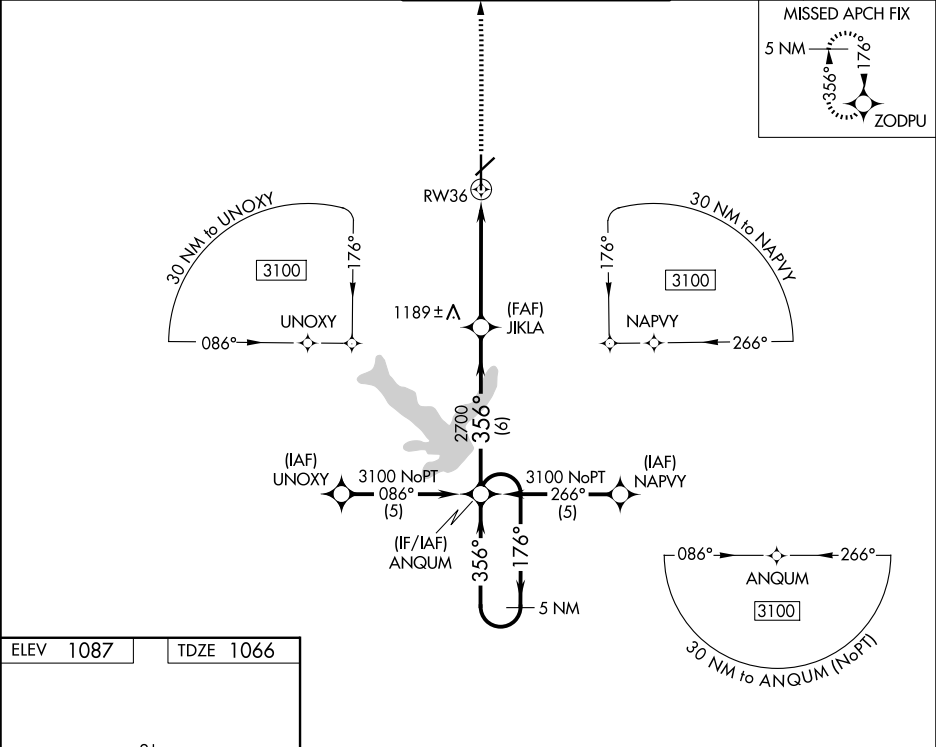

ELEV 1087	TDZE 1066
------------------	------------------

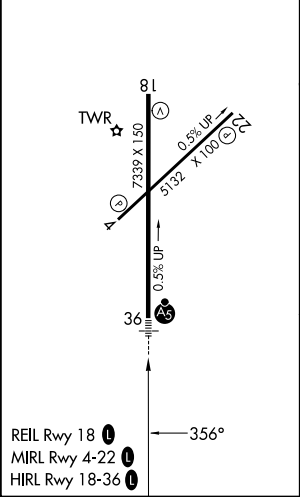

5 NM Holding Pattern				3100	ZODPU
GP 3.00° TCH 50					
ANQUM				1.1 NM to RW36	
JIKLA				RW36	
6 NM				3.9 NM	
1.1 NM				1.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1316-1/2 250 (300-1/2)				
LNAV MDA	1440-1/2	374 (400-1/2)	1440-5/8 374 (400-5/8)	1440-1 374 (400-1)	
CIRCLING	1560-1	473 (500-1)	1580-1 1/2 493 (500-1 1/2)	1640-2 553 (600-2)	

NC-2, 03 SEP 2026 to 01 OCT 2026

NC-2, 03 SEP 2026 to 01 OCT 2026