
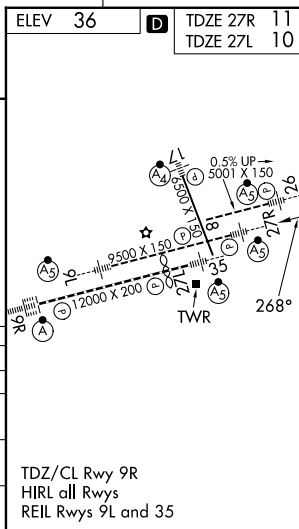
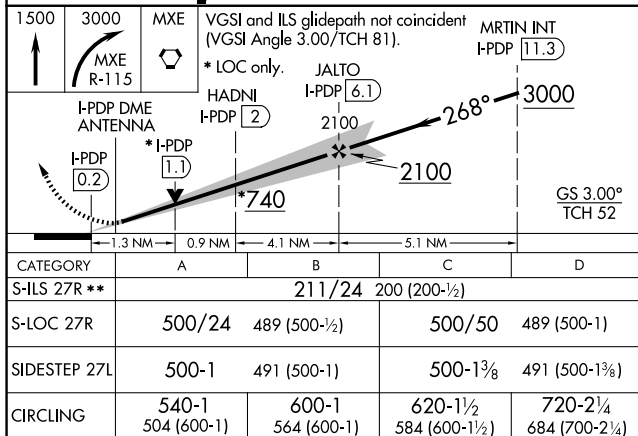


ILS or LOC RWY 27R
PHILADELPHIA INTL (PHL)

T For inop ALS, increase S-LOC 27R Cat C/D visibility to 1 $\frac{3}{8}$ SM.
A **RVR 1800 authorized with the use of FD or AP or HUD to DA.

27R MALSR 	27L MALSR 	MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on MXE VORTAC R-115 to MXE VORTAC and hold.
---	---	---

D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6
-----------------	---------------------------------------	--	------------------------

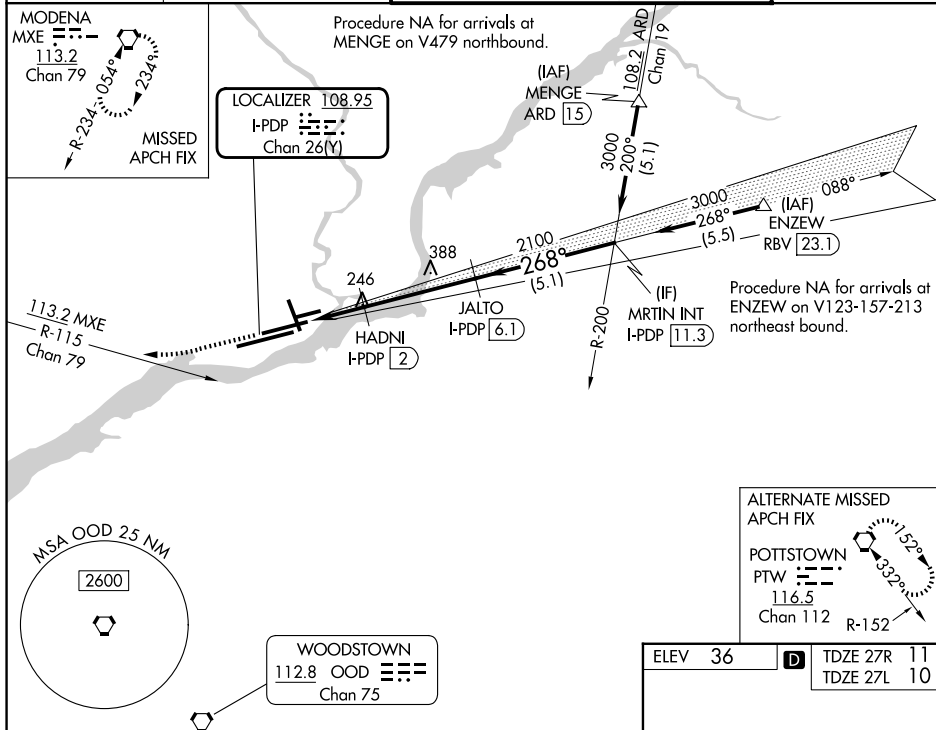

NE-4, 03 SEP 2026 to 01 OCT 2026