
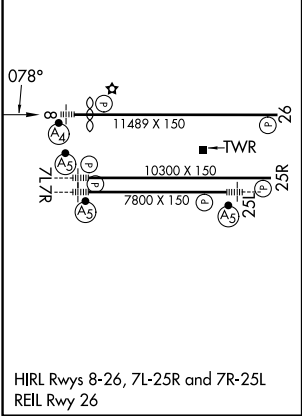


WAAS CH 86611 W08A	APP CRS 078°	Rwy Ldg 10591 TDZE 1118 Apt Elev 1135
--	------------------------	--

RNAV (GPS) Y RWY 8

PHOENIX SKY HARBOR INTL (PHX)

RNP APCH - GPS.		MAISF	MISSED APPROACH: Climb to 3000 then climbing left turn to 5000 direct AVENT and hold.
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV Cats C and D visibility to 2 SM.			
D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (8-26) 120.9 254.3 (7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)

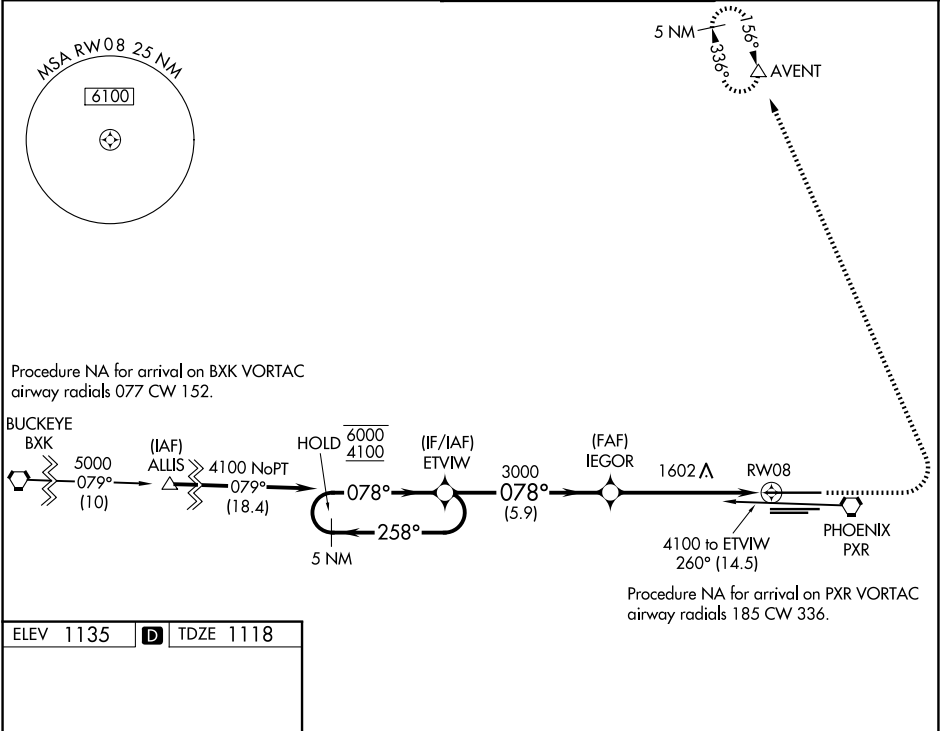

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).			
5 NM Holding Pattern			
ETVIW			
IEGOR			
3000			
2.1 NM to RWY08			
RWY08			
5.9 NM			
3.6 NM			
2.1			
CATEGORY	A	B	C
LPV DA	1368-3/4 250 (300-3/4)		
LNAV MDA	1860-3/4 742 (800-3/4)	1860-1 742 (800-1)	1860-1 7/8 742 (800-1 1/8)
CIRCLING	1860-1 725 (800-1)	1860-1 1/4 725 (800-1 1/4)	2040-2 3/4 905 (1000-2 3/4) 2340-3 1205 (1300-3)

SW-4, 03 SEP 2026 to 01 OCT 2026

SW-4, 03 SEP 2026 to 01 OCT 2026