

WAAS CH 58023 W34A	APP CRS 337°	Rwy Ldg 6081 TDZE 50 Apt Elev 54
--	------------------------	---

RNAV (GPS) RWY 34

RHODE ISLAND TF GREEN INTL (PVD)

RNP APCH


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop MALSR, increase LNAV/VNAV all Cats visibility to RVR 5000. For inop MALSR, increase LNAV Cat A/B visibility to RVR 5500, and Cat C/D visibility to RVR 6000. Rwy 34 helicopter visibility reduction below RVR 4000 NA.

MALSR



MISSED APPROACH:
Climb to 2500 direct
KUNDE and on track
316° to FOSTY and
hold.

D-ATIS 124.2	PROVIDENCE APP CON ★ 123.675 244.875	PROVIDENCE TOWER ★ 120.7 (CTAF) 0 257.8	GND CON 121.9 348.6
------------------------	--	---	-------------------------------

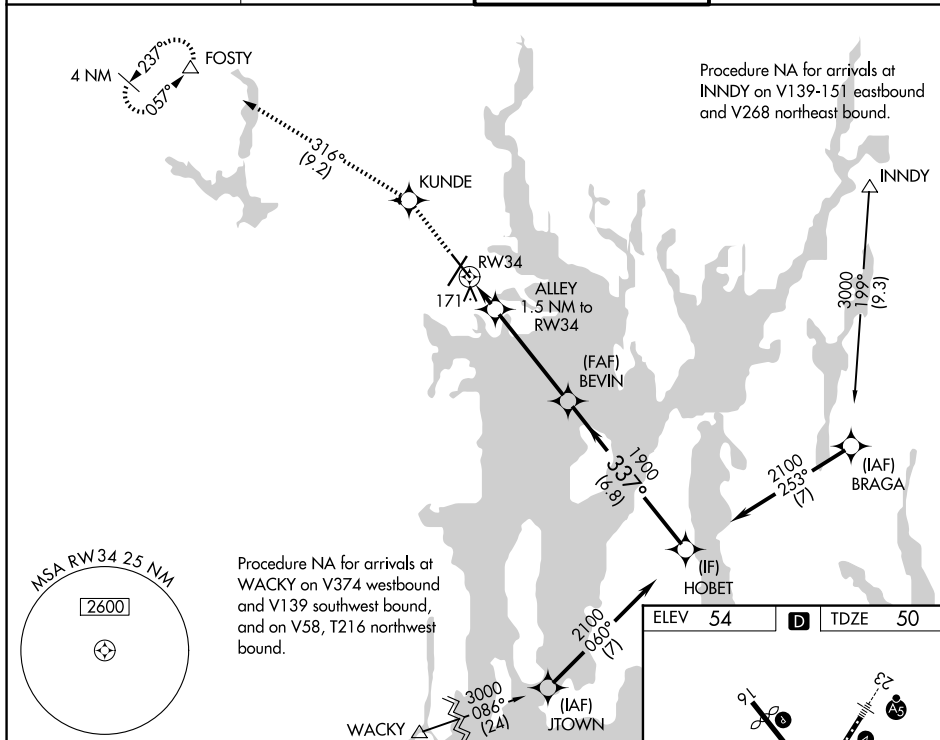

2500 KUNDE FOSTY VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 60.)

↑

ir 316° △

HOBBET

*LNAV only.

ALLEY 1.5 NM to RW34

RW34

BEVIN 1900

2100

337°

1900

*560

GP 3.00° TCH 53

1.5 NM 4.2 NM 6.8 NM

CATEGORY	A	B	C	D
LPV DA	330/40		280 (300-¾)	
LNAV/VNAV DA	349/40		299 (300-¾)	
LNAV MDA	440/40		390 (400-¾)	
CIRCLING	560-1 506 (600-1)	640-1 586 (600-1)	640-1½ 586 (600-1½)	860-2½ 806 (900-2½)

