

LOC/DME I-SZK 111.1 Chan 48	APP CRS 072°	Rwy Ldg 6800 TDZE 1175 Apt Elev 1175
---	------------------------	---

LDA Z RWY 6
ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

ADF required. RADAR required for procedure entry.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 5000 direct VIT NDB and hold, continue climb-in-hold to 5000. Missed approach requires minimum climb of 350 feet per NM to 3600.





❄️ -12°C For inop ALS, increase S-LDA/GS 6 visibility all Cats to 7/8 SM.

ATIS
132.375

ROANOKE APP CON
133.225 339.8

ROANOKE TOWER
118.3 257.8

GND CON	
121.9	257.8

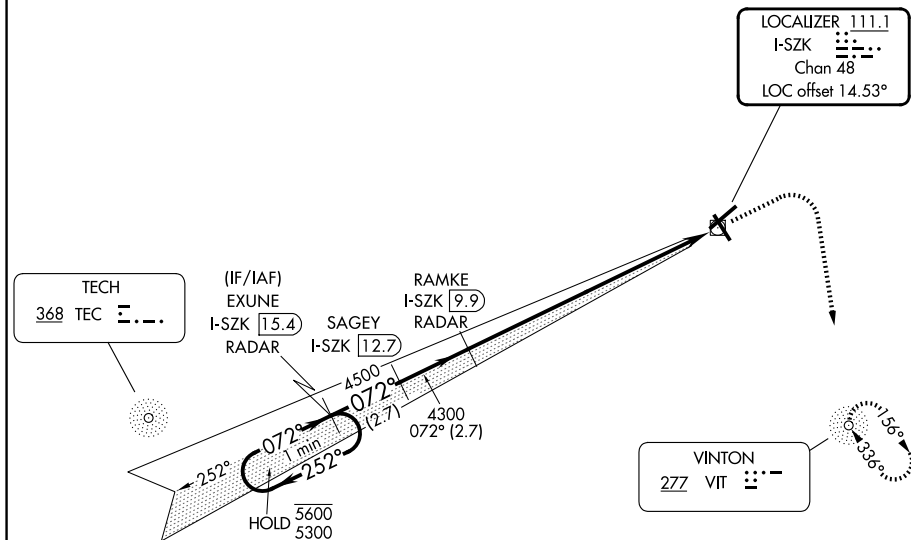

LDA/GLIDE SLOPE

