


LOC I-SLN	APP CRS	Rwy Ldg
108.9	353°	12300
		TDZE
		1271
		Apt Elev
		1288

ILS or LOC RWY 35


SALINA RGNL (SLN)

For inop ALS, increase S-ILS 35 Cat E visibility to ¾ SM and S-LOC 35 Cats C/D/E to 1½ SM. Circling NA for Cats D and E southwest of Rwy 12-30.	MALSR	MISSED APPROACH: Climb to 1700 then climb to 3000 direct SLN VORTAC and hold.
---	-------	---

ATIS	KANSAS CITY CENTER	SALINA TOWER ★	GND CON	UNICOM
120.15	134.9 363.2	119.3 (CTAF) 0 257.7	121.9 360.8	122.95

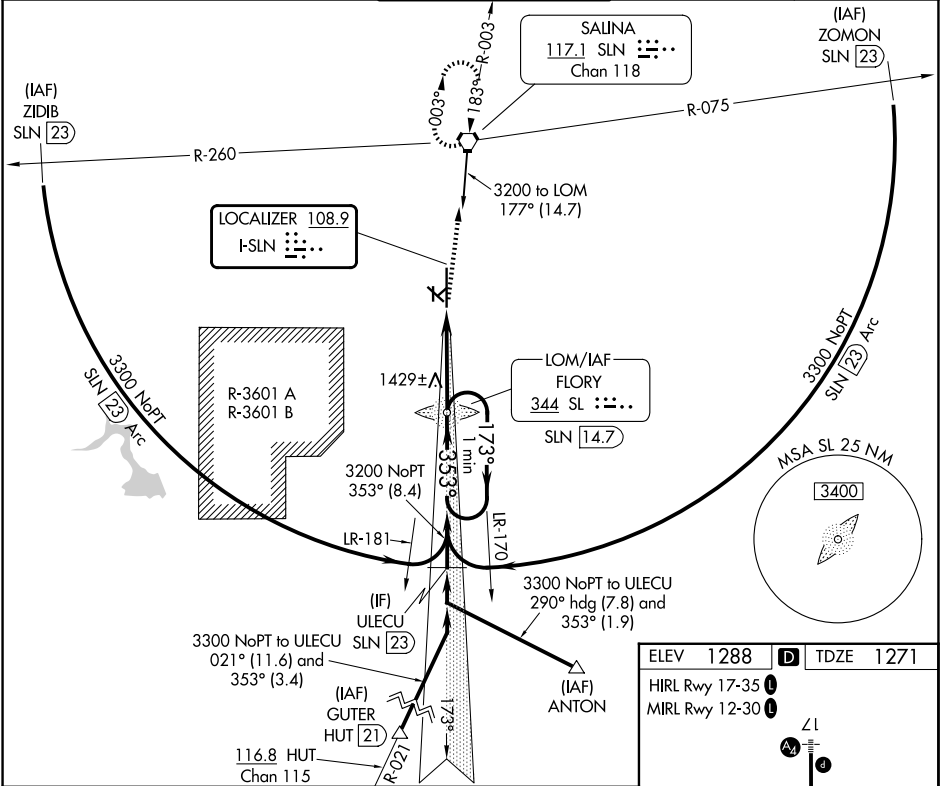

1700	3000	SLN	SL LOM SLN 14.7				One Minute Holding Pattern	
↑	↑	⬡	3166				173° → 3200 ← 353° 3200	
SLN 10.1			GS 3.00° TCH 48					
1.1 NM			4.6 NM					
CATEGORY	A		B	C	D	E		
S-ILS 35	1471-½ 200 (200-½)							
S-LOC 35	1680-½ 409 (400-½)			1680-¾ 409 (400-¾)				
CIRCLING	1820-1 532 (600-1)	1840-1 552 (600-1)	1860-1½ 572 (600-1½)	1860-2 572 (600-2)	1920-2¼ 632 (700-2¼)			

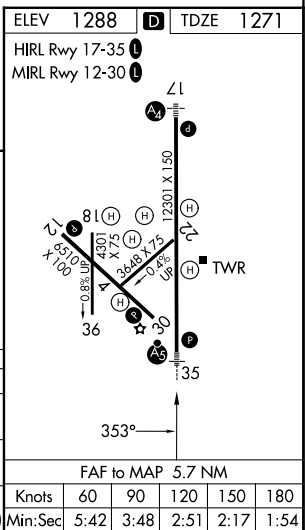

NC-2, 03 SEP 2026 to 01 OCT 2026

NC-2, 03 SEP 2026 to 01 OCT 2026