


LOC/DME I-SLC 109.5 Chan 32	APP CRS 344°	Rwy Ldg 12002 TDZE 4225 Apt Elev 4231
---	------------------------	--

ILS or LOC RWY 34R
SALT LAKE CITY INTL (SLC)

RNP APCH-GPS. From QWENN or JAZZZ.	ALSF-2	MISSED APPROACH: Climb to 9000 direct TCH VORTAC and on TCH VORTAC R-331 to OGD VORTAC and hold.
DME required for LOC only. DME or RADAR required.		
Simultaneous approach authorized. For inop ALS, increase S-LOC 34R Cat C/D visibility to RVR 5500.		

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 119.05 257.8	GND CON 123.775 348.6
---------------------------------	--	---	---------------------------------

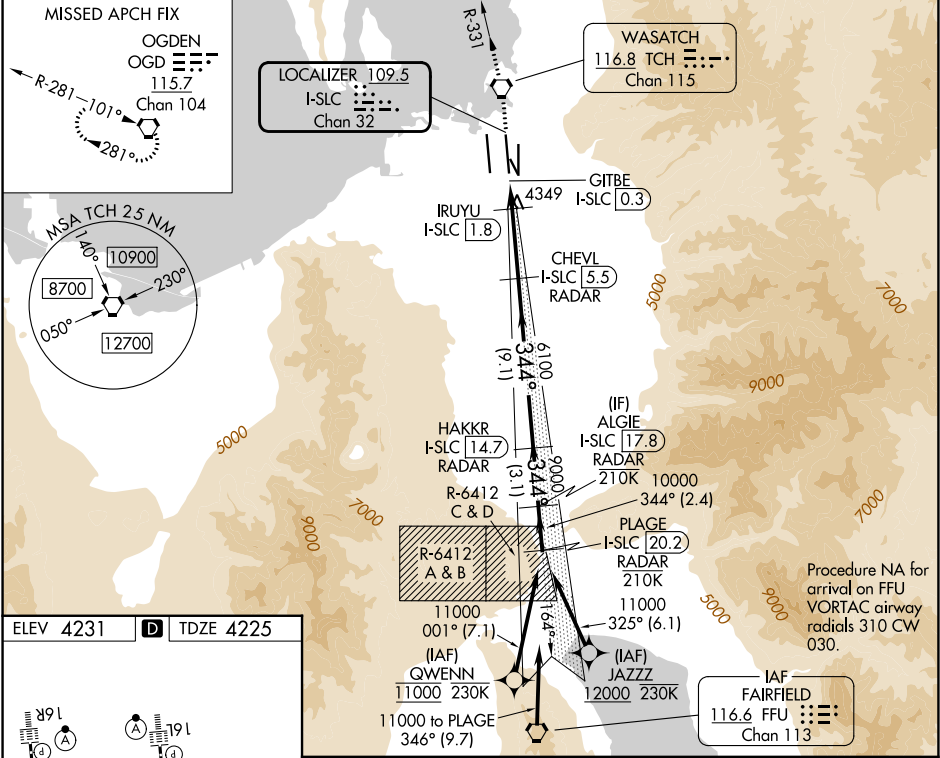

ELEV 4231	D	TDZE 4225
HIRL all rwys TDZL/RCLS Rwy 16L, 16R, 17, 34L, 34R and 35		
9000 TCH	TCH R-331	OGD
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).		
I-SLC DME ANTENNA	CHEVL I-SLC 5.5 RADAR	HAKKR I-SLC 14.7 RADAR
GITBE I-SLC 0.3	IRUYU I-SLC 1.8	ALGIE I-SLC 17.8 RADAR
PLAGE I-SLC 20.2 RADAR		
GS 3.00° TCH 55		
CATEGORY	A	B
S-ILS 34R	4425/18	200 (200-1/2)
S-LOC 34R	4600/24	375 (400-1/2)
		4600/35
		375 (400-5/8)

SW-4, 03 SEP 2026 to 01 OCT 2026

SW-4, 03 SEP 2026 to 01 OCT 2026