


APP CRS	Rwy Ldg	9596
169°	TDZE	4222
	Apt Elev	4231

RNAV (RNP) Z RWY 17


SALT LAKE CITY INTL (SLC)

RNP AR APCH - GPS.	MALSR	MISSED APPROACH: Climb to 4700 then climb to 10000 direct FFU VORTAC and hold.
For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 5500.		

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	118.3 257.8	123.775 348.6

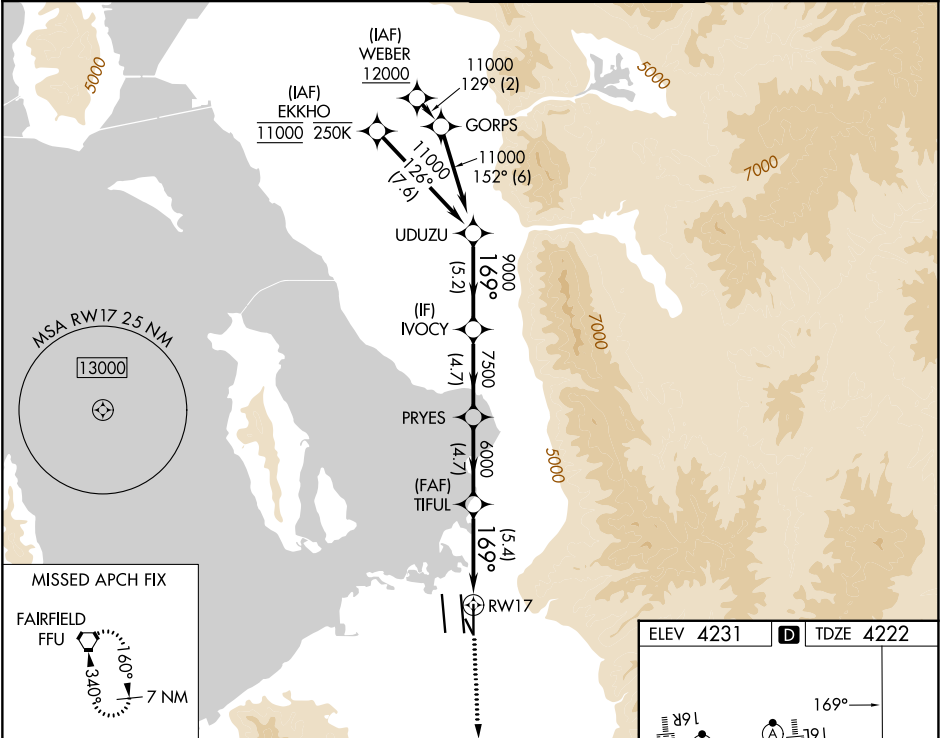

UDUZU	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).	4700	10000	FFU
11000	169°	9000	7500	6000
GP 3.00°	TCH 55	5.2 NM	4.7 NM	4.7 NM
CATEGORY	A	B	C	D
RNP 0.20 DA	4472/24	250 (300-½)		
RNP 0.30 DA	4564/30	342 (400-⅝)		
AUTHORIZATION REQUIRED				

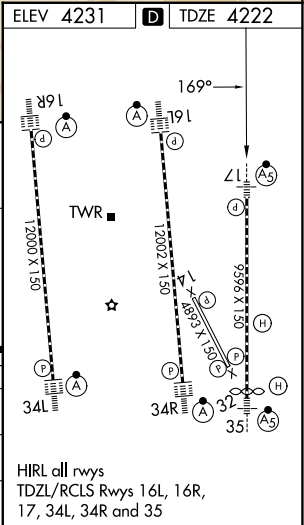

SW-4, 03 SEP 2026 to 01 OCT 2026

SW-4, 03 SEP 2026 to 01 OCT 2026