


WAAS CH 77517 W03A	APP CRS 038°	Rwy Ldg TDZE 1917 Apt Elev 1919
--	------------------------	---

RNAV (GPS) RWY 3
SAN ANGELO RGNL/MATHIS FLD (SJT)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. ▲ For inop ALS, increase LPV Cat E visibility to RVR 4000, and LNAV/VNAV Cat E and LNAV Cat E visibility to RVR 6000. Circling NA for Cat E west of Rwy 18-36. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR A5 Climb to 3800 direct LITAZ and hold.
--	---

ATIS 128.45 319.0	SAN ANGELO APP CON ★ 125.35 354.1	MATHIS TOWER ★ 118.3(CTAF) 284.7	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-------------------------

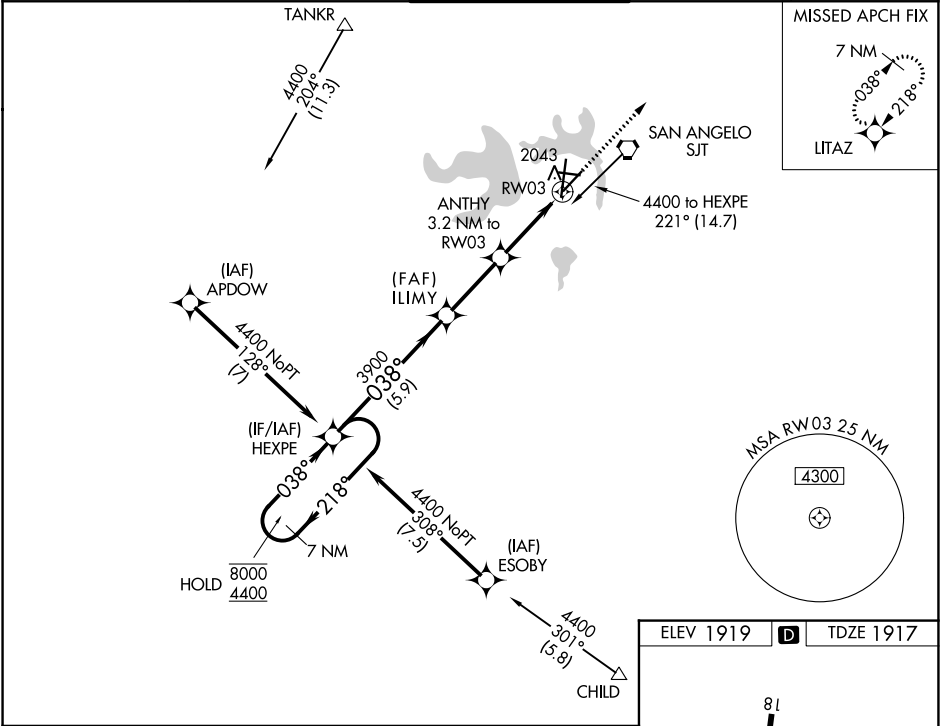

7 NM Holding Pattern					HEXPE	ILIMY		ANTHY	3800		LITAZ	
8000 4400					←218° 038°	038°	3900	3.2 NM to RW03	1 NM to RW03	RW03		
GP 3.00° TCH 51					5.9 NM		2.8 NM	2.2 NM	1 NM			
CATEGORY	A		B		C		D		E			
LPV DA #	2117/24					200 (200-½)						
LNAV/VNAV DA	2300/35					383 (400-¾)						
LNAV MDA	2300/24		383 (400-½)		2300/35 383 (400-¾)							
CIRCLING	2360-1 441 (500-1)		2380-1 461 (500-1)		2500-1½ 581 (600-1½)		2700-2½ 781 (800-2½)		2700-2¾ 781 (800-2¾)			

