



APP CRS	Rwy Ldg	8505
217°	TDZE	770
	Apt Elev	809

RNAV (RNP) Z RWY 22
SAN ANTONIO INTL (SAT)


RNP AR APCH - GPS. Authorization required. From BRSQT: min RNP 0.50. From NADDE: RF.	MISSED APPROACH: Climb to 3100 direct IMIKE and on track 137° to EMBOW and hold.
For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C.	

D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6
-----------------	------------------------------------	----------------------------------	------------------------

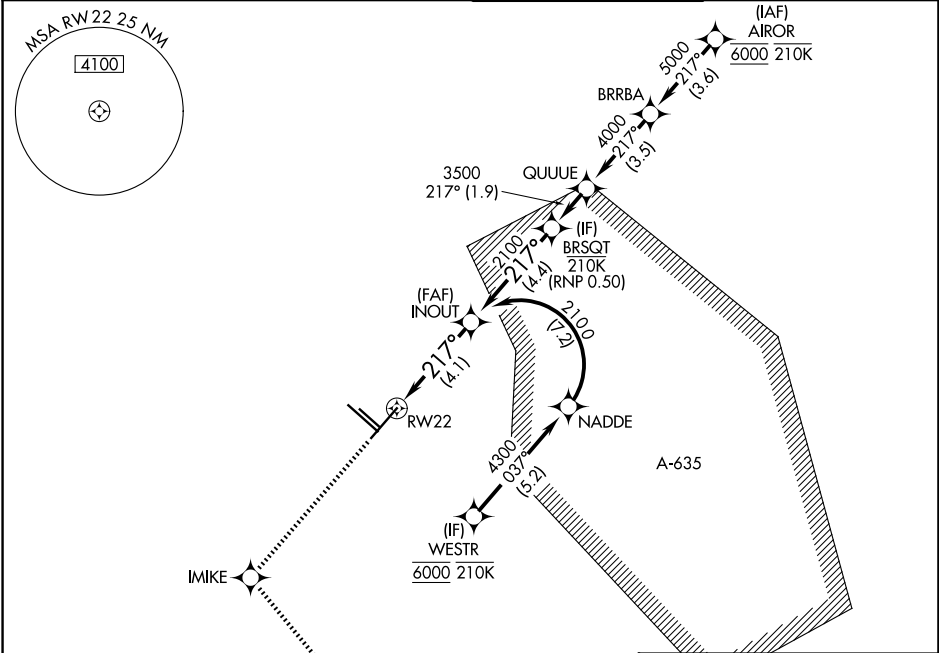

3100	IMIKE	EMBOW
↑	✱	△
	tr 137°	


See planview for multiple IF locations.



CATEGORY	A	B	C	D
RNP 0.15 DA		1070-7/8	300 (300-7/8)	
RNP 0.30 DA		1220-13/8	450 (500-13/8)	

AUTHORIZATION REQUIRED

ELEV 809	D	TDZE 770
----------	---	----------



TDZL/RCLS Rwy 13R
REIL Rwy 13L, 22 and 31R
HIRL Rwy 4-22 and 13R-31L
MIRL Rwy 13L-31R