

LOC FSD
109.9

APP CRS
030°

Rwy Ldg
TDZE
Apt Elev
8999
1424
1430

ILS or LOC RWY 3

JOE FOSS FLD (FSD)

ADF or RADAR required.

⚠


ASR

For inop ALS, increase S-LOC 3 Cats C/D visibility to 1½ SM, and S-LOC 3 MAREY fix minimums Cats C/D to 1½ SM.

MALSR

MISSED APPROACH: Climb to 3400 then left turn direct FSD VORTAC and hold.

ATIS 126.6	SIoux FALLS APP CON* 125.8 284.725	SIoux FALLS TOWER* 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	--	---	-------------------------------	-------------------------

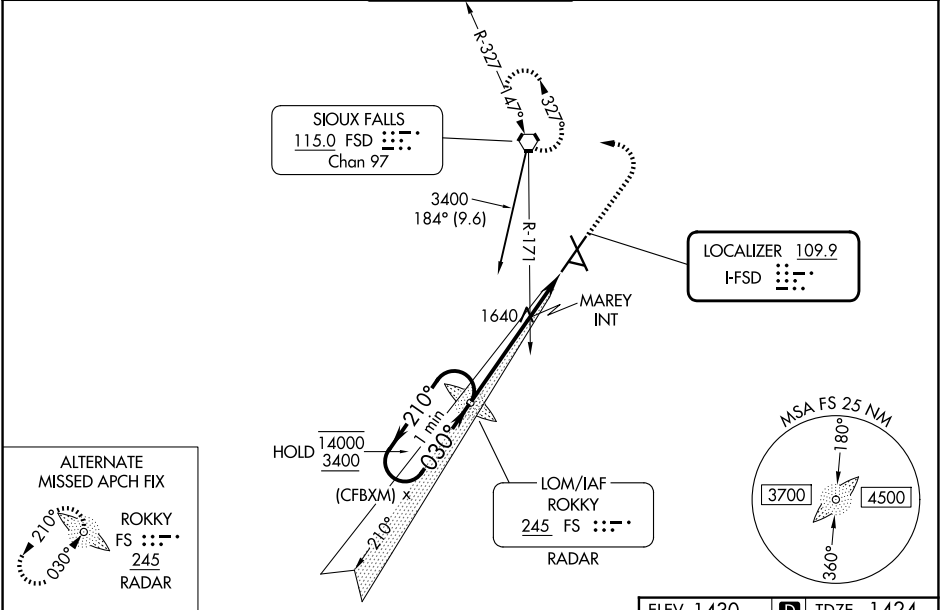

One Minute Holding Pattern

14000 3400

GS 3.00° TCH 54

210° 030°

3400

3305

FS LOM ROKKY RADAR

2100

3.7 NM

2 NM

3400

FSD

CATEGORY	A	B	C	D
S-ILS 3	1674/24 250 (300-½)			
S-LOC 3	2100/24 676 (700-½)		2100-1½ 676 (700-1½)	
CIRCLING	2100-1 670 (700-1)		2100-1⅞ 670 (700-1⅞)	2200-2½ 770 (800-2½)
MAREY FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 3	1940/24 516 (600-½)		1940/55 516 (600-1)	
CIRCLING	1980-1 550 (600-1)		2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)

ELEV 1430

TDZE 1424

15 21 33

9000 X 150

8000 X 150

3151 X 75

030°

TDZ/CL Rwy 21

MIRL Rwy 9-27

REIL Rwys 15 and 33

HIRL Rwys 3-21 and 15-33

FAF to MAP 5.7 NM

Knots

Min:Sec

60 5:42

90 3:48

120 2:51

150 2:17

180 1:54