WAAS	APP CRS	Rwy Ldg	8999
CH 97722	030°	TDZE	1424
W03A		Apt Elev	1430

RNAV (GPS) RWY 3

JOE FOSS FLD (FSD)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to 1⅜ SM.

ASR

-30°C

MALSR

MISSED APPROACH: Climb to 4000 direct MOPUE and hold.

ATIS	SIOUX FALLS APP CON★	SIOUX FALLS TOWER★	GND CON	UNICOM
126.6	125.8 284.725	118.3 (CTAF) L 257.8	121.9 348.6	122.95

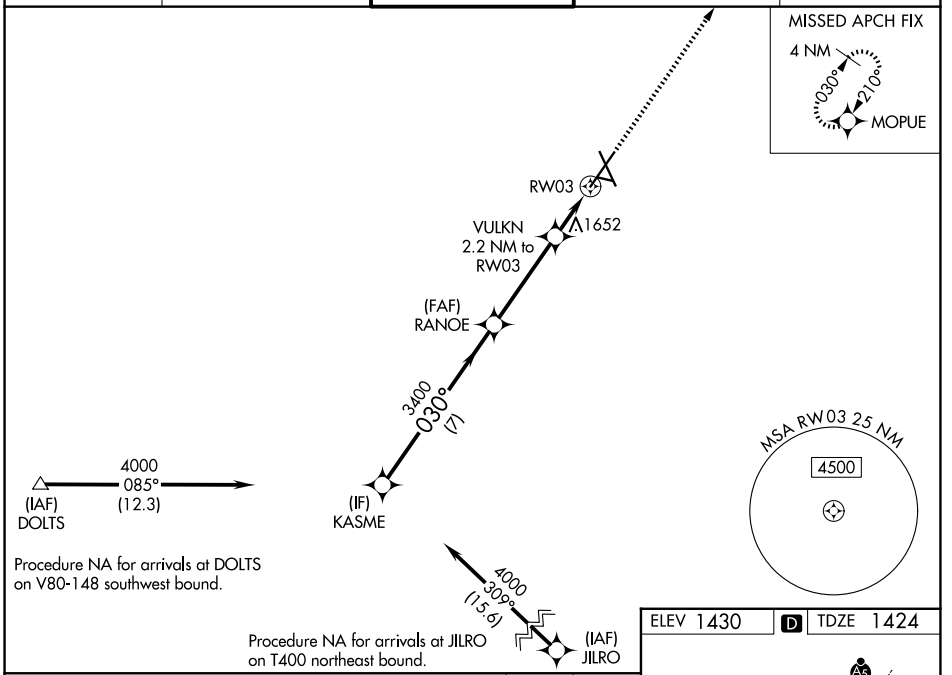

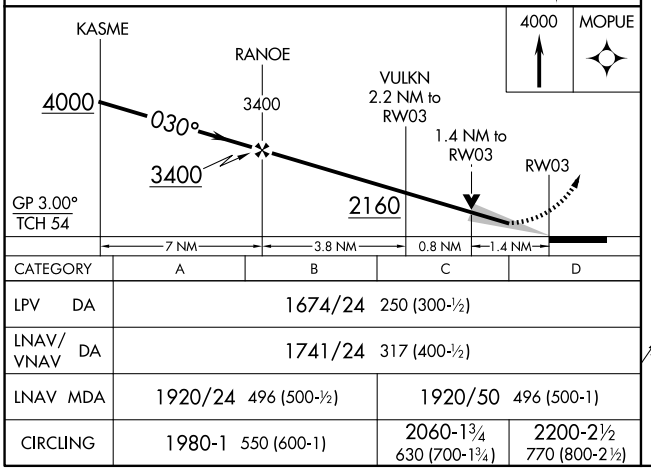

CATEGORY	A	B	C	D
LPV DA	1674/24 250 (300-½)			
LNAV/VNAV DA	1741/24 317 (400-½)			
LNAV MDA	1920/24 496 (500-½)		1920/50 496 (500-1)	
CIRCLING	1980-1 550 (600-1)		2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)

ELEV 1430 D TDZE 1424

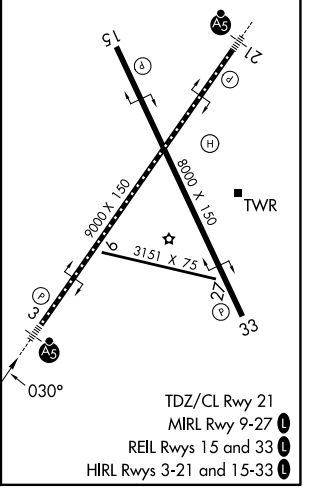

TDZ/CL Rwy 21
MIRL Rwy 9-27 L
REIL Rwys 15 and 33 L
HIRL Rwys 3-21 and 15-33 L

NC-1, 03 SEP 2026 to 01 OCT 2026
NC-1, 03 SEP 2026 to 01 OCT 2026