
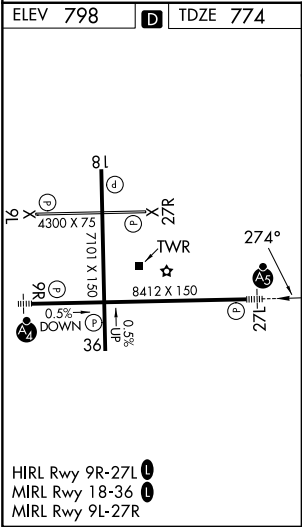


WAAS CH 50108 W27A	APP CRS 274°	Rwy Ldg 8412 TDZE 774 Apt Elev 798
--	------------------------	---

RNAV (GPS) RWY 27L

SOUTH BEND INTL (SBN)

RNP APCH - GPS		MALSR	MISSED APPROACH: Climb to 2600 direct TOKOC and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Circling to Rwy 27R NA at night. For inop ALS, increase LNAV Cat C/D visibility to 1 3⁄8 SM.		⚠	
ATIS 120.675	SOUTH BEND APP CON★ 118.55 257.8	SOUTH BEND TOWER★ 135.675 (CTAF) 0 257.8	GND CON 121.7

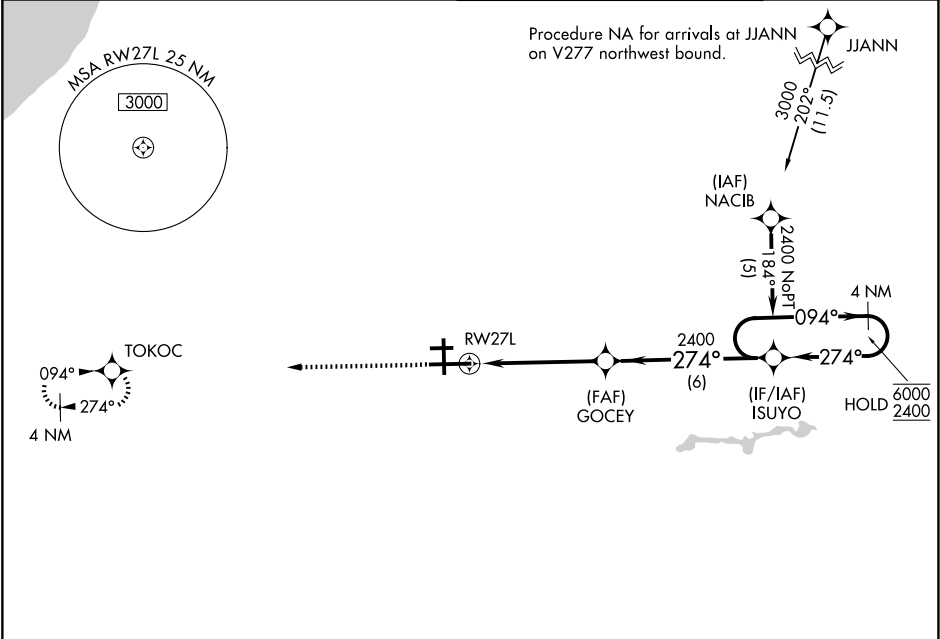

2600	TOKOC	GOCEY	ISUYO	4 NM Holding Pattern
2600		2400		
1.4 NM to RW27L		274°	094°	6000
		2400	274°	2400
GP 3.00° TCH 53				
1.4 NM	3.5 NM	6 NM		
CATEGORY	A	B	C	D
LPV DA		1030/24	256 (300-1⁄2)	
LNAV/VNAV DA		1160/40	386 (400-3⁄4)	
LNAV MDA	1260/24	486 (500-1⁄2)	1260/50	486 (500-1)
CIRCLING	1280-1	482 (500-1)	1440-1 3⁄4 642 (700-1 3⁄4)	1520-2 1⁄4 722 (800-2 1⁄4)