

LOC/DME I-TXK	APP CRS	Rwy Ldg	6602
111.9	220°	TDZE	384
Chan 56		Apt Elev	390


ILS or LOC RWY 22
TEXARKANA RGNL-WEBB FLD (TXK)

For inop ALS, increase S-LOC 22 Cats C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 900 then climbing right turn to 2000 direct TXK VORTAC and hold, continue climb-in-hold to 2000.

ATIS	FORT WORTH CENTER	TEXARKANA TOWER ★	GND CON
120.2	123.925 269.475	123.875 (CTAF) 0 235.625	119.225

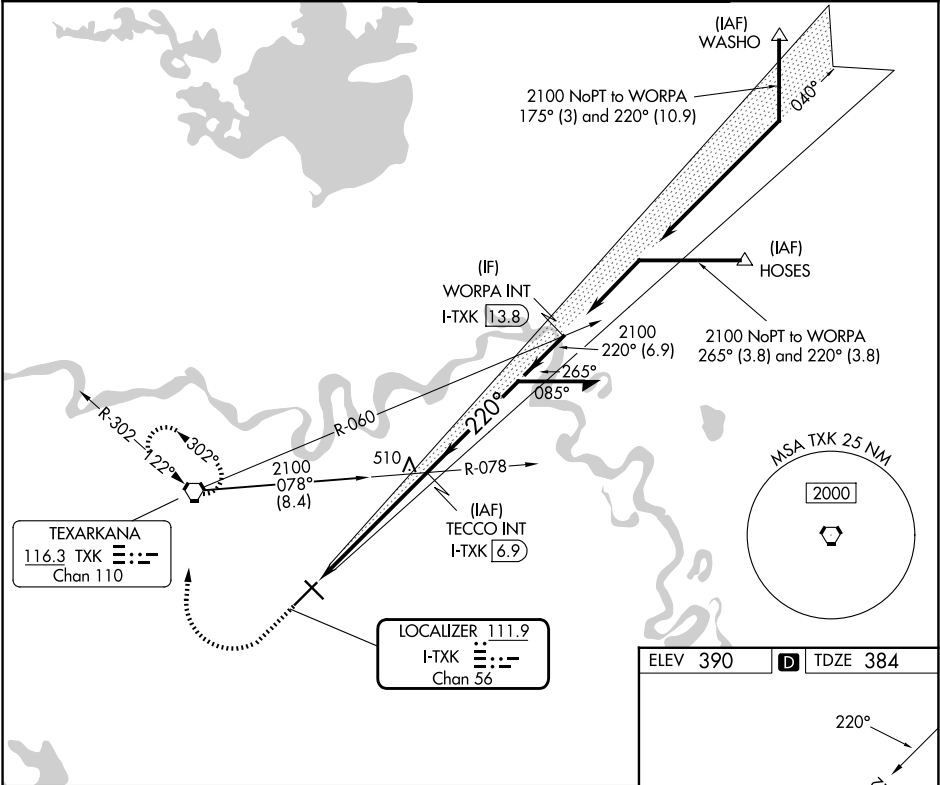

	900	2000	TXK	
				TECCO INT I-TXK 6.9
				Remain within 10 NM
				2100
				040°
				220°
				2100
				GS 2.75°
				TCH 48
				1 NM 4.6 NM
CATEGORY	A	B	C	D
S-ILS 22		584-1/2	200 (200-1/2)	
S-LOC 22	760-1/2	376 (400-1/2)	760-5/8	376 (400-5/8)
CIRCLING	820-1 430 (500-1)	900-1 510 (600-1)	1000-1 3/4 610 (700-1 3/4)	1080-2 1/4 690 (700-2 1/4)

ELEV 390

D

TDZE 384

MIRL Rwy 13-31

HIRL Rwy 4-22

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52