


LOC I-TVC 110.7	APP CRS 279°	Rwy Ldg 7016 TDZE 616 Apt Elev 624
---------------------------	------------------------	--


ILS or LOC RWY 28


CHERRY CAPITAL (TVC)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct TVC VOR/DME and hold, continue climb-in-hold to 3000.	
Aircraft not GPS equipped - RADAR required for procedure entry.				
▼ ▲ ❄ -21°C S-LOC 28 minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2½ SM. AYATA FIX minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 SM.				
ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER ★ 124.2 (CTAF) 0 348.6	GND CON 121.8 348.6	UNICOM 122.95

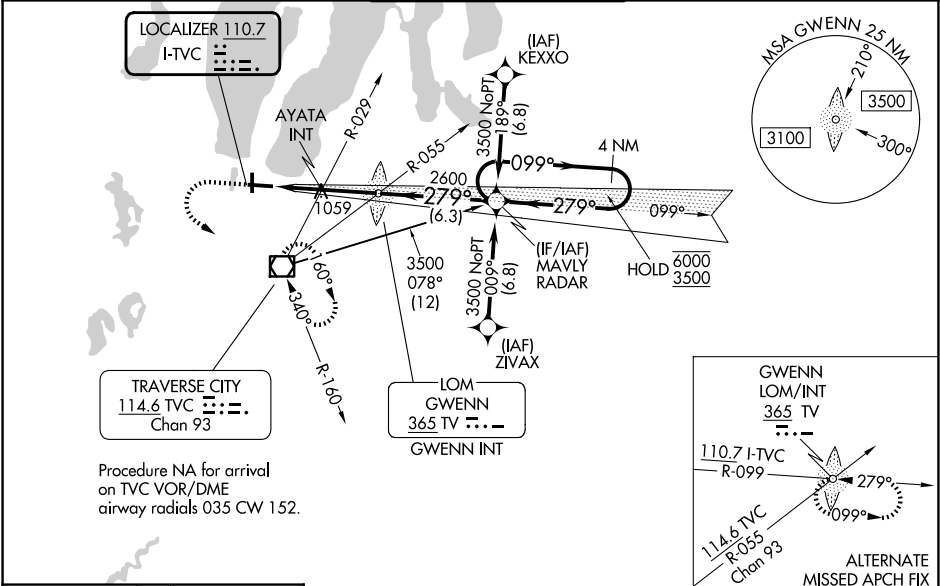

ELEV 624	D	TDZE 616
----------	---	----------

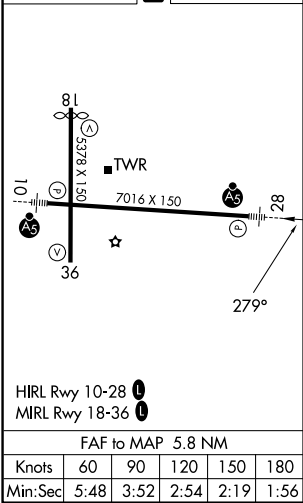

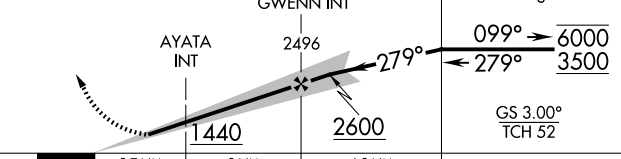1100	3000	TVC	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).				
							
CATEGORY	A		B		C		D
S-ILS 28			816- $\frac{1}{2}$		200 (200- $\frac{1}{2}$)		
S-LOC 28	1440- $\frac{1}{2}$ 824 (900- $\frac{1}{2}$)		1440- $\frac{3}{4}$ 824 (900- $\frac{3}{4}$)		1440-1 $\frac{7}{8}$ 824 (900-1 $\frac{7}{8}$)		824 (900-1 $\frac{7}{8}$)
CIRCLING	1440-1 $\frac{1}{4}$		816 (900-1 $\frac{1}{4}$)		1440-2 $\frac{1}{2}$ 816 (900-2 $\frac{1}{2}$)		1720-3 1096 (1100-3)
AYATA FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)							
S-LOC 28	1320- $\frac{1}{2}$		704 (700- $\frac{1}{2}$)		1320-1 $\frac{5}{8}$		704 (700-1 $\frac{5}{8}$)
CIRCLING	1320-1		696 (700-1)		1420-2 $\frac{1}{4}$ 796 (800-2 $\frac{1}{4}$)		1720-3 1096 (1100-3)