


WAAS CH 42610 W10A	APP CRS 099°	Rwy Ldg TDZE 624 Apt Elev 624
--	------------------------	---


RNAV (GPS) RWY 10

CHERRY CAPITAL (TVC)

RNP APCH - GPS.		MALS R	MISSED APPROACH: Climb to 4000 direct ROPTe and on track 1.57° to LADIN and hold.
Rwy 10 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LPV visibility all Cats to ¾ SM. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cats C and D.		AS	

ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER* 124.2 (CTAF) 0 348.6	GND CON 121.8 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

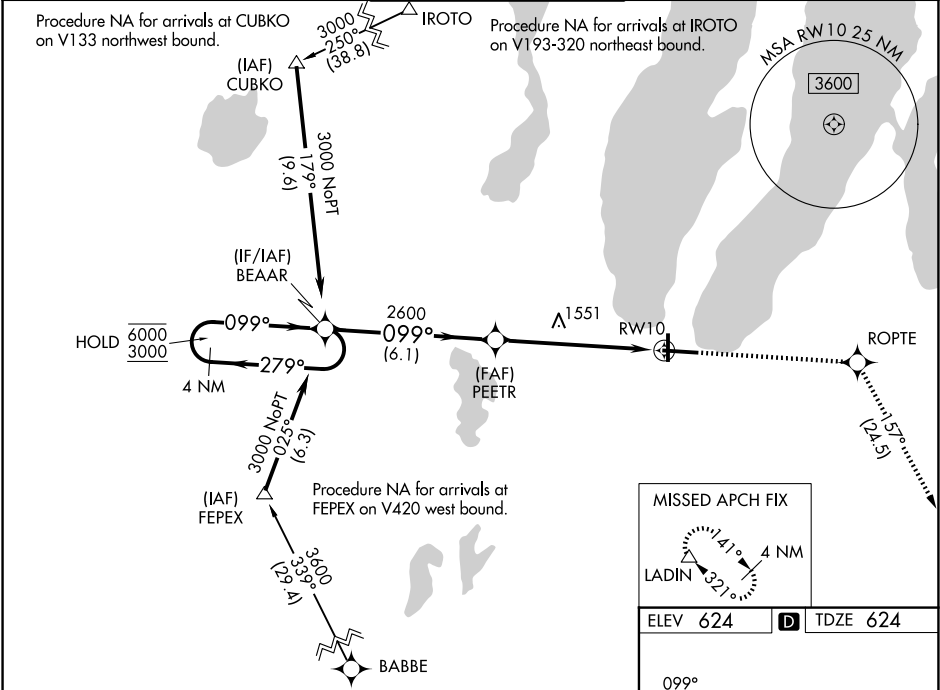

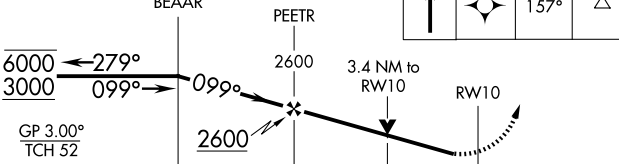4 NM Holding Pattern						
						
CATEGORY	A	B	C	D		
LPV DA	909-¾		285 (300-¾)			
LNAV/ VNAV DA	1780-4		1156 (1200-4)			
LNAV MDA	1780-¾ 1156 (1200-¾)	1780-1 1156 (1200-1)	1780-3	1156 (1200-3)		
CIRCLING	1780-1¼ 1156 (1200-1¼)	1780-1½ 1156 (1200-1½)	1780-3	1156 (1200-3)		

