

VORTAC ACT	APP CRS	Rwy Ldg	5103
115.3	321°	TDZE	516
Chan 100		Apt Elev	516



VOR/DME RWY 32
WACO RGNL (ACT)

ASR

VDP NA with Mc Gregor Exec altimeter setting. When local altimeter setting not received use Mc Gregor Exec altimeter setting and increase all MDA 40 feet; increase S-32 Cats C/D visibility 1/8 mile and Circling Cat D visibility 1/4 mile.

MISSED APPROACH: Climb to 3000 direct ACT VORTAC and hold, continue climb-in-hold to 3000.

ATIS 123.85	WACO APP CON* 127.65 227.125	WACO TOWER* 119.3 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------	---------------------------------	-----------------------------------	------------------	------------------

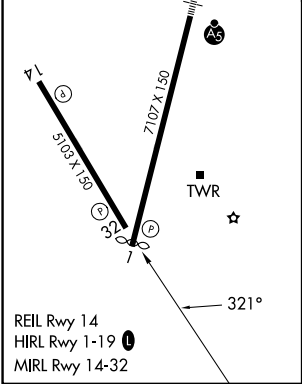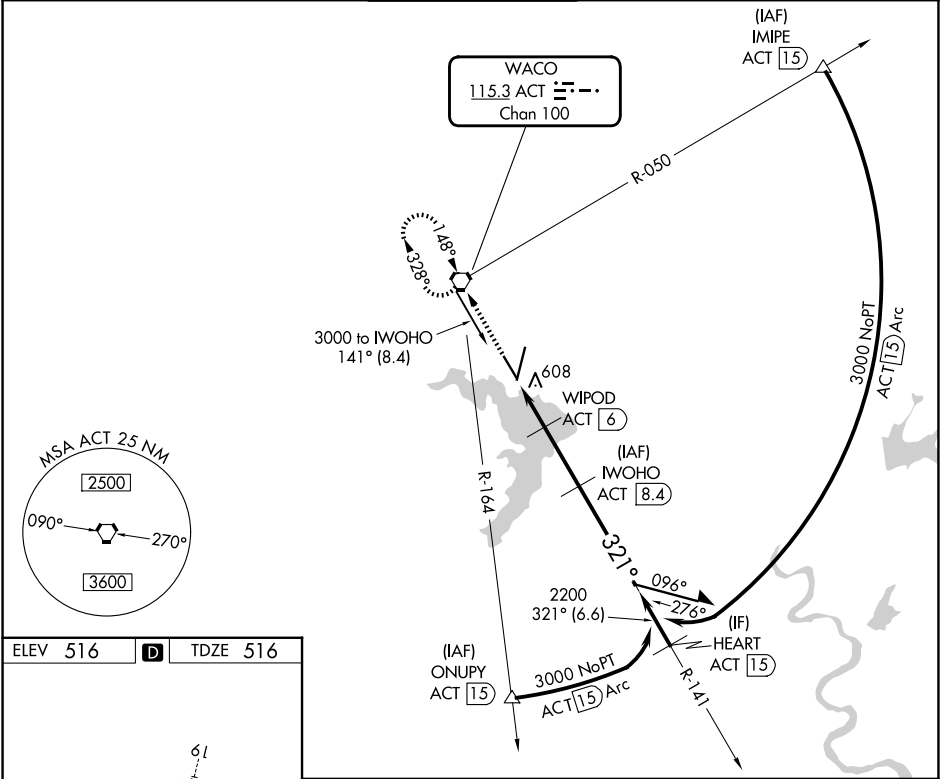

3000	ACT	WIPOD ACT 6	IWOHO ACT 8.4	Remain within 10 NM
3000	ACT	WIPOD ACT 6	IWOHO ACT 8.4	3000
2200	ACT	WIPOD ACT 6	IWOHO ACT 8.4	2200
1300	ACT	WIPOD ACT 6	IWOHO ACT 8.4	1300
0.9	1.1	2.4		
CATEGORY	A	B	C	D
S-32	860-1 344 (400-1)			
CIRCLING	940-1 424 (500-1)	980-1 464 (500-1)	1020-1½ 504 (600-1½)	1160-2 644 (700-2)

SC-3, 03 SEP 2026 to 01 OCT 2026

SC-3, 03 SEP 2026 to 01 OCT 2026