


WAAS CH 53515 W27A	APP CRS 268°	Rwy Ldg 7000 TDZE 72 Apt Elev 80
--	------------------------	---

RNAV (GPS) RWY 27
NEW CASTLE (ILG)


⚠ Baro-VNAV NA when using Philadelphia Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV DA NA below -15°C (5°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Philadelphia Intl altimeter setting: increase LPV DA to 480, LNAV/VNAV DA to 584, and all MDAs 60 feet; increase LPV all Cts and LNAV Cat C/D visibility ½ SM and LNAV/VNAV all Cts and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct BATRE and via track 273° to ELUDE and hold.

ATIS 123.95	PHILADELPHIA APP CON 118.35 323.1	WILMINGTON TOWER * 126.0 (CTAF) 352.05	GND CON 121.7 275.8	UNICOM 122.95
-----------------------	---	---	-------------------------------	-------------------------

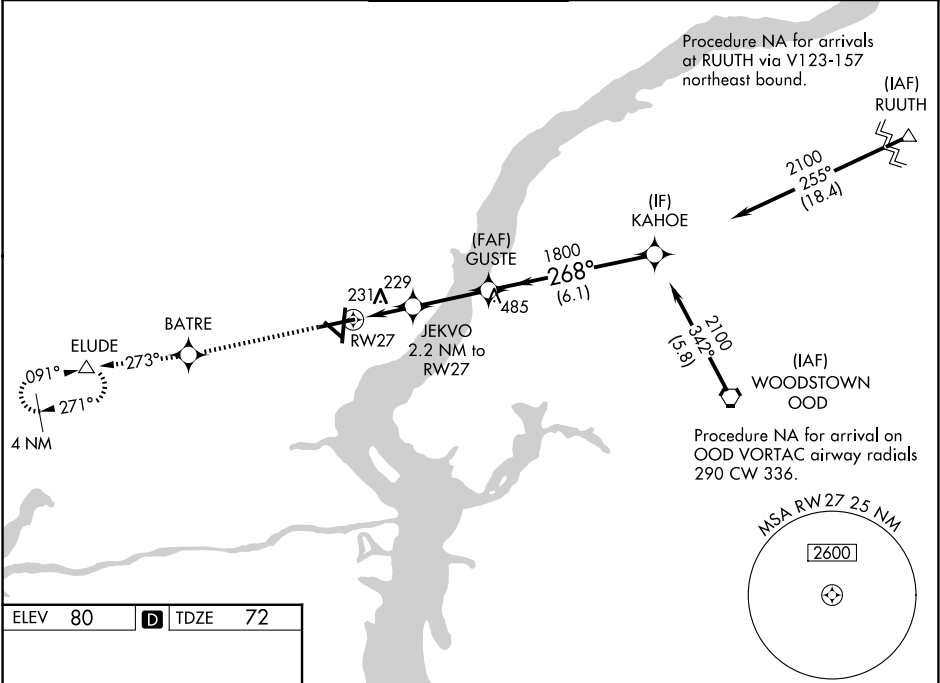

ELEV 80	D	TDZE 72
---------	----------	---------

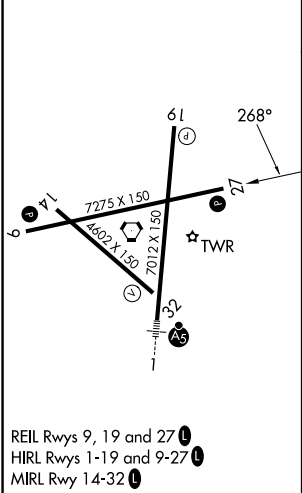

2000	BATRE	tr 273°	ELUDE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 54).	Procedure Turn NA
* LNAV only.					
JEKVO 2.2 NM to RW27					
RW27					
860*					
2.2 NM					
2.8 NM					
6.1 NM					
CATEGORY	A	B	C	D	
LPV DA	426-1 ½	354 (400-1 ½)			
LNAV/VNAV DA	530-1 ½	458 (500-1 ½)			
LNAV MDA	500-1	428 (500-1)	500-1 ¼	428 (500-1 ¼)	
CIRCLING	540-1 460 (500-1)	560-1 480 (500-1)	600-1 ½ 520 (600-1 ½)	800-2 ¼ 720 (800-2 ¼)	

NE-3, 03 SEP 2026 to 01 OCT 2026

NE-3, 03 SEP 2026 to 01 OCT 2026