
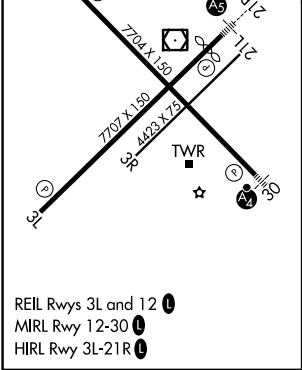


VOR/DME PSC	APP CRS	Rwy Ldg	7110
113.75	217°	TDZE	404
Chan 84(Y)		Apt Elev	410

VOR RWY 21R
TRI-CITIES (PSC)

DME required.	MALSR	MISSED APPROACH: Climbing left turn to 3200 on heading 080° and PSC VOR/DME R-092 PSC VOR/DME to CITYS INT/ PSC 14 DME and hold.
▼ VDP NA when using Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting and increase all MDA 100 feet and increase S-21R Cat C/D visibility ¾ SM and Circling Cat C/D visibility ¼ SM. For inop ALS when using Hermiston altimeter setting, increase Cat C/D visibility to 1¾ SM.	AS	

ATIS 125.65	SPOKANE APP CON* 128.75 377.2	TRI-CITIES TOWER* 135.3 (CTAF) 285.55	GND CON 121.8	UNICOM 122.95
----------------	----------------------------------	--	------------------	------------------

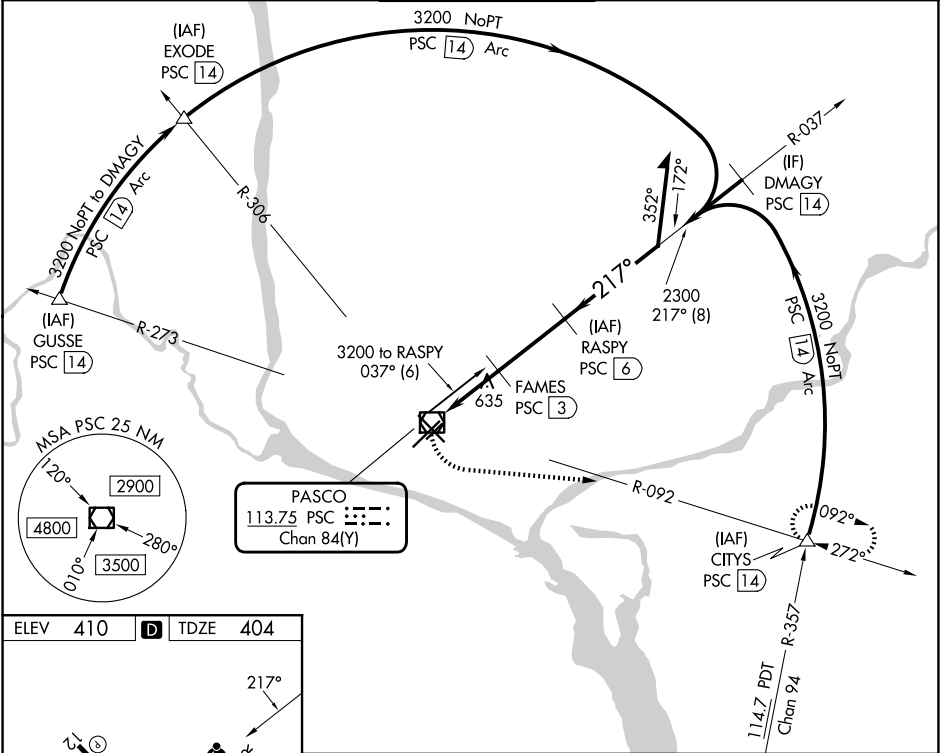

3200	PSC R-092	CITYS	RASPY PSC 6	Remain within 10 NM
hdg 080°				
PSC VOR/DME	PSC 1.5	FAMES PSC 3	2.95° TCH 54	
	1360	2300		
	1.4 NM	1.5 NM	3 NM	
CATEGORY	A	B	C	D
S-21R	940/24	536 (600-½)	940/55	536 (600-1)
CIRCLING	940-1	530 (600-1)	1040-1¾ 630 (700-1¾)	1100-2¼ 690 (700-2¼)

NW-1, 03 SEP 2026 to 01 OCT 2026

NW-1, 03 SEP 2026 to 01 OCT 2026