

LOC/DME I-EVV 109.9 Chan 36	APP CRS 221°	Rwy Ldg TDZE 422 Apt Elev 422
---	------------------------	---

ILS or LOC RWY 22
EVANSVILLE RGNL (EVV)

RADAR or DME required for procedure entry at AUGUS.


⚠


Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1¾ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

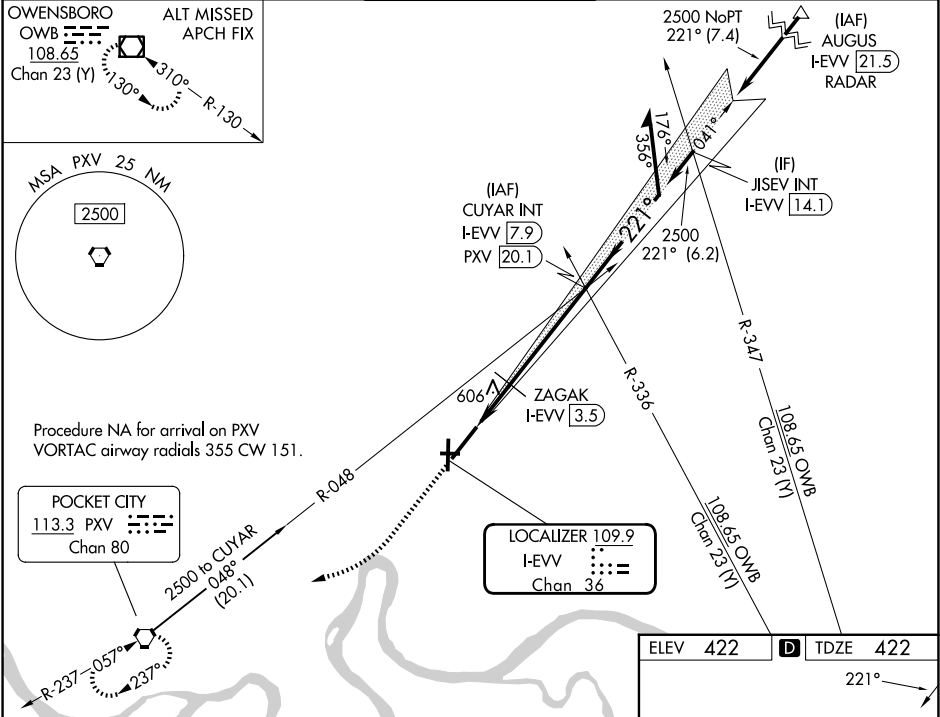

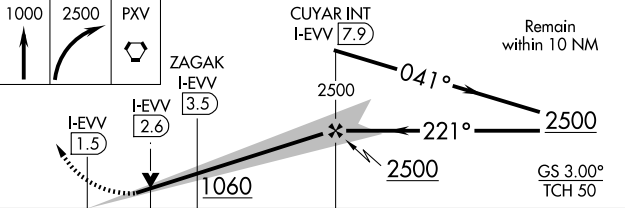1000 ↑	2500 ↗	PXV 					Remain within 10 NM		
CATEGORY		A		B		C		D	
S-ILS 22 *		622/24		200 (200-½)					
S-LOC 22		1060/24	638 (700-½)	1060-1¾ 638 (700-1¾)		1060-2 638 (700-2)			
CIRCLING		1060-1	638 (700-1)	1060-1¾ 638 (700-1¾)		1060-2 638 (700-2)			
ZAGAK FIX MINIMUMS (DME REQUIRED)									
S-LOC 22		840/24	418 (500-½)	840/40		418 (500-¾)			
CIRCLING		920-1 498 (500-1)	1040-1 618 (700-1)	1040-1¾ 618 (700-1¾)		1040-2 618 (700-2)			

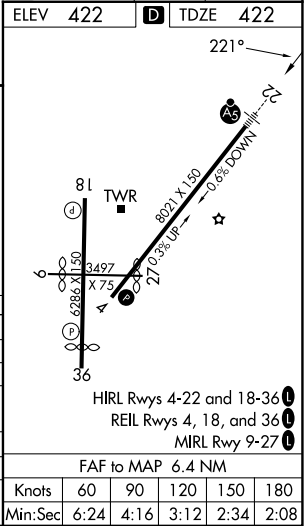

EC-2, 03 SEP 2026 to 01 OCT 2026

EC-2, 03 SEP 2026 to 01 OCT 2026