



WAAS CH 90421 W36A	APP CRS 004°	Rwy Ldg TDZE 384 Apt Elev 422
--	------------------------	---

RNAV (GPS) RWY 36

EVANSVILLE RGNL (EVV)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2500 direct HEMEE and hold.
ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Rwy 36 helicopter visibility reduction below ¾ SM NA. Circling Rwy 9 NA at night.	

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7(CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

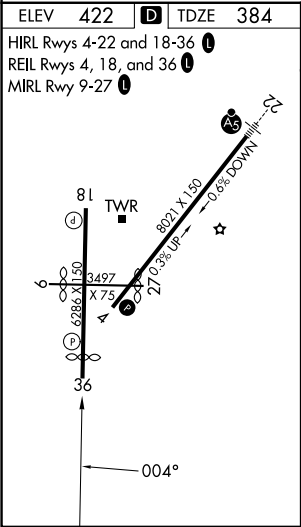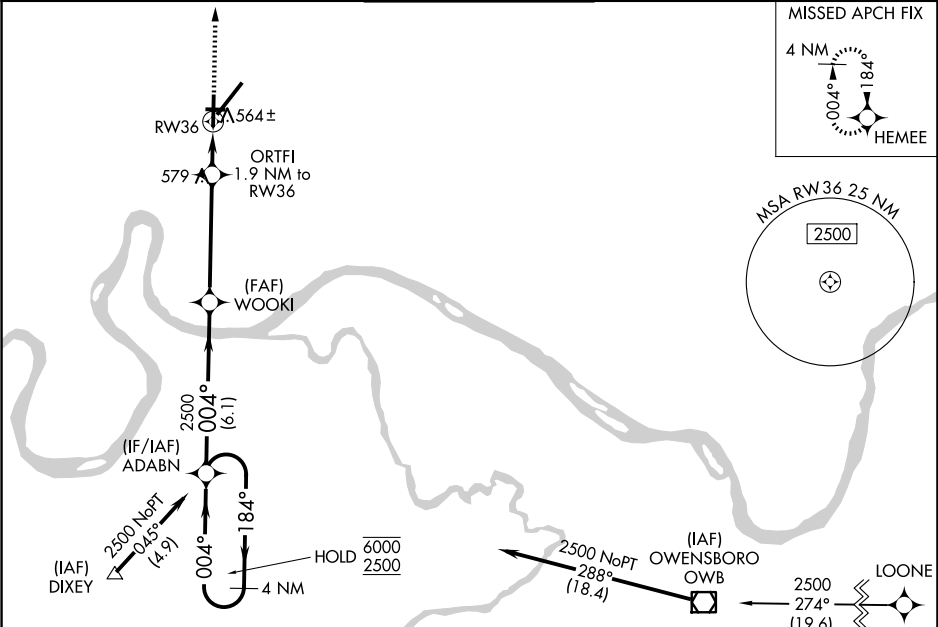

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).		2500	HEMEE
ADABN		WOOKI		ORTFI	1.9 NM to RW36
6000 ← 184°		004° →		1.3 NM to RW36	
2500		2500		1040	
GP 3.00°		TCH 55		1.3	
6.1 NM		4.6 NM		0.6 NM	
CATEGORY	A	B	C	D	
LPV DA	640-3/4		256 (300-3/4)		
LNAV/VNAV DA	891-13/8		507 (500-13/8)		
LNAV MDA	820-1	436 (400-1)	820-1 1/4	436 (400-1 1/4)	
CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1 3/4 618 (700-1 3/4)	1040-2 618 (700-2)	