
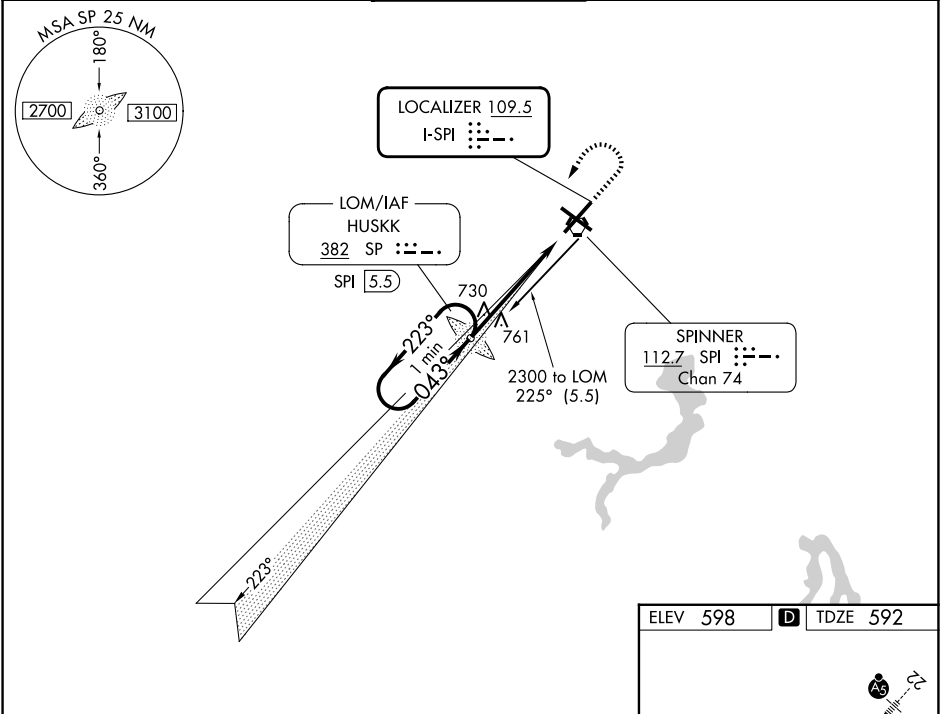


LOC I-SPI	APP CRS	Rwy Ldg	7927
109.5	043°	TDZE	592
		Apt Elev	598

ILS or LOC RWY 4
ABRAHAM LINCOLN CAPITAL (SPI)

ADF Required.		MALSR		MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct HUSKK LOM and hold.
⚠ When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. For inop ALS when using Lincoln altimeter setting, increase S-LOC 4 Cats C and D visibility to 1¾ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Lincoln altimeter setting).				
ATIS	SAINT LOUIS APP CON	SPRINGFIELD TOWER ★	GND CON	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) 257.8	121.9 348.6	122.95

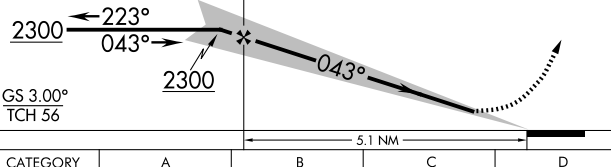

One Minute Holding Pattern		SP LOM SPI 5.5	1500 	2300 	SP 
					
CATEGORY	A	B	C	D	
S-ILS 4	* 792/24 200 (200-½)				
S-LOC 4	1020/24 428 (500-½)		1020/40 428 (500-¾)		
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)	

