

WAAS CH 70309 W04A	APP CRS 043°	Rwy Ldg TDZE Apt Elev	7927 592 598
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4
ABRAHAM LINCOLN CAPITAL (SPI)


RNP APCH - GPS.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using AAA altimeter setting. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cats C and D visibility to 1 3⁄8 SM. When local altimeter setting not received, use AAA altimeter setting and increase LPV DA to 912 feet; increase LNAV/VNAV DA to 989 feet and all visibilities to RVR 3500; increase all MDAs 60 feet and LNAV visibility Cats C and D to RVR 5500 and Circling visibility Cats C and D 1⁄4 SM. For inop ALS when using AAA altimeter setting, increase LPV all Cats visibility to RVR 4500.

 MISSED APPROACH:
Climb to 2600 direct
REYCO and hold.

ATIS 127.65 270.1	SAINT LOUIS APP CON 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	--	-------------------------------	-------------------------

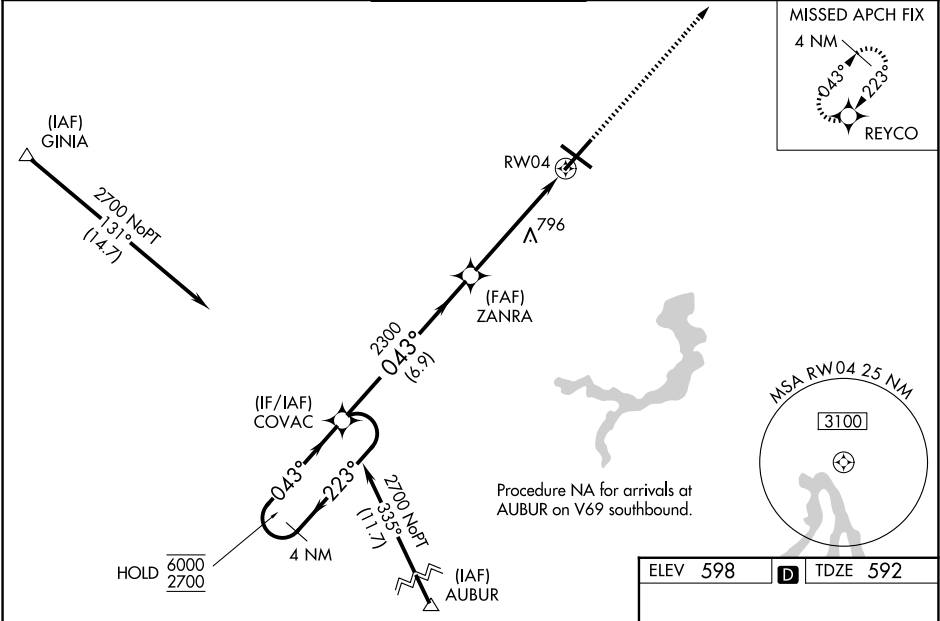

4 NM Holding Pattern

CATEGORY	A	B	C	D
LPV DA		854/24	262 (300-1⁄2)	
LNAV/VNAV DA		931/26	339 (400-1⁄2)	
LNAV MDA	1060/24	468 (500-1⁄2)	1060/50	468 (500-1)
CIRCLING	1060-1 462 (500-1)	1100-1 502 (600-1)	1360-2 1⁄4 762 (800-2 1⁄4)	1380-2 1⁄2 782 (800-2 1⁄2)

ELEV 598 TDZE 592

REIL Rwy 13
HIRL Rws 4-22 and 13-31

EC-3, 03 SEP 2026 to 01 OCT 2026

EC-3, 03 SEP 2026 to 01 OCT 2026