

WAAS CH 45527 W28A	APP CRS 281°	Rwy Ldg TDZE Apt Elev	9708 1134 1203
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 28C

PITTSBURGH INTL (PIT')


RNP APCH - GPS.

⚠

Circling Rwy 14 NA at night. Rwy 28C helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.

MISSED APPROACH:
Climb to 4000 direct EPONE and on track 220° to HLG VOR/DME and hold.

D-ATIS 127.25	PITTSBURGH APP CON 123.95 360.8	PITTSBURGH TOWER 128.3 291.7	GND CON SOUTH 121.9 348.6 NORTH 127.8 348.6
-------------------------	---	--	---

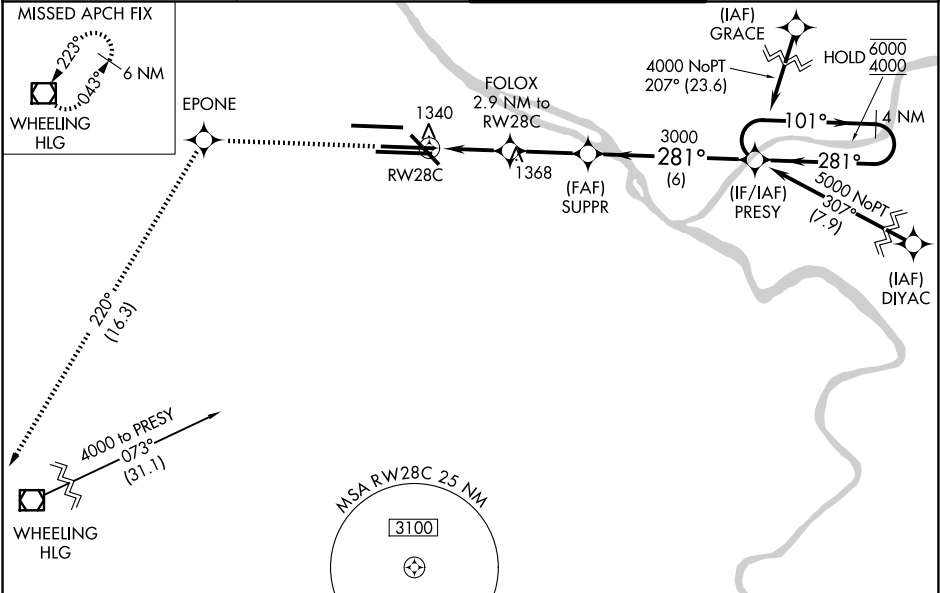

ELEV 1203	D	TDZE 1134
------------------	----------	------------------

4000

↑

EPONE

✧

tr

220°

HLG

⬡

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).

4 NM Holding Pattern

FOLOX

2.9 NM to RW28C

1.3 NM to RW28C

2100

3000

281°

101°

6000

4000

GP 3.00° TCH 50

1.3

1.6

2.8 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	1384/40	250 (200-¾)		
LNAV/VNAV DA	1544/60	410 (400-1¼)		
LNAV MDA	1600/55	466 (400-1)	1600-1¾	466 (400-1¾)
CIRCLING	1700-1	497 (500-1)	1880-2	1880-2¼

REIL Rwy 10C

HIRL all rwys

TDZL/RCLS Rwy 10L, 10R, 28L, 28R, 28C, and 32