

WAAS CH 73020 W17A	APP CRS 174°	Rwy Ldg TDZE Apt Elev	8600 470 470
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17L

TSTC WACO (CNW)

RNP APCH.

⚠

ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM.

MALS R

AS

MISSED APPROACH: Climb to 2300 direct OMOBE and hold.

AWOS-3PT 134.225	WACO APP CON ★ 127.65 227.125	TSTC TOWER ★ 124.0 (CTAF) 255.7	GND CON 121.7 0	UNICOM 122.95
----------------------------	---	---	---------------------------	-------------------------

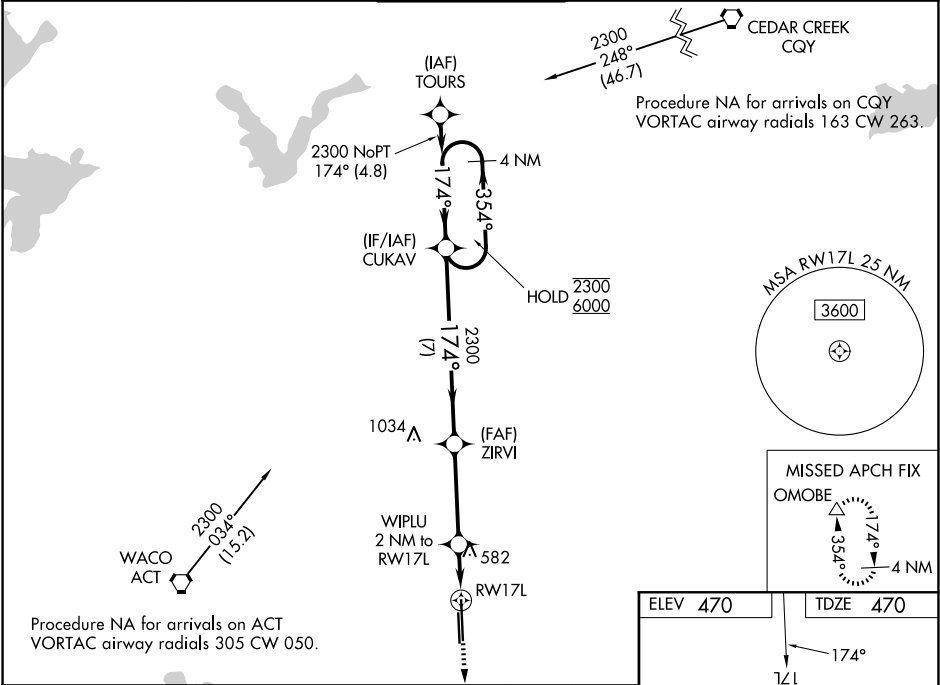

4 NM Holding Pattern

6000

2300

GP 3.00° TCH 52

CUKAV

ZIRVI

2300

2300

174°

174°

354°

354°

7 NM

3.6 NM

1 NM

1 NM

WIPLU

2 NM to RWY 17L

2300

OMOBE


*LNAV only.

*1140

*1 NM to RWY 17L

RWY 17L

CATEGORY	A	B	C	D
LPV DA		670-½	200 (200-½)	
LNAV/VNAV DA		720-½	250 (300-½)	
LNAV MDA	840-½	370 (400-½)	840-⅝	370 (400-⅝)
CIRCLING	940-1 470 (500-1)	1040-1 570 (600-1)	1040-1½ 570 (600-1½)	1120-2 650 (700-2)

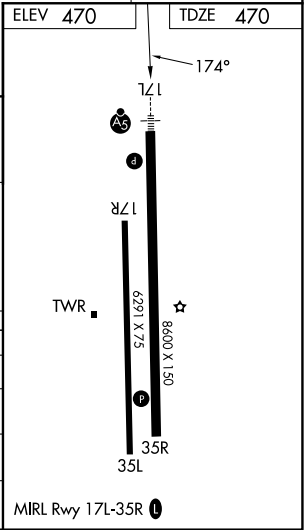

SC-3, 03 SEP 2026 to 01 OCT 2026

SC-3, 03 SEP 2026 to 01 OCT 2026