
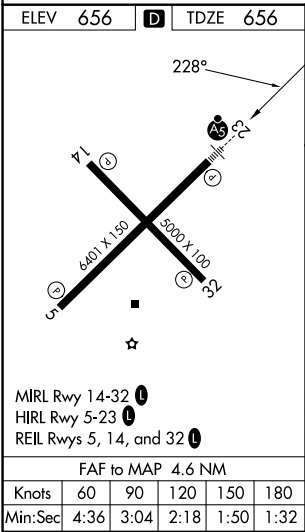


LOC I-BAK 110.7	APP CRS 228°	Rwy Ldg TDZE Apt Elev 6401 656 656
---------------------------	------------------------	--

ILS or LOC RWY 23
COLUMBUS MUNI (BAK)

ADF or RADAR required. NA For inop ALS increase S-LOC 23 Cats C/D visibility to 1 1/2 SM.		MALS R 	MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct CLIFS LOM and hold, continue climb-in hold to 2300.	
AWOS-3 119.75	INDIANAPOLIS APP CON 134.85 317.8	COLUMBUS TOWER ★ 118.6 (CTAF) 0	GND CON 121.6	UNICOM 122.95

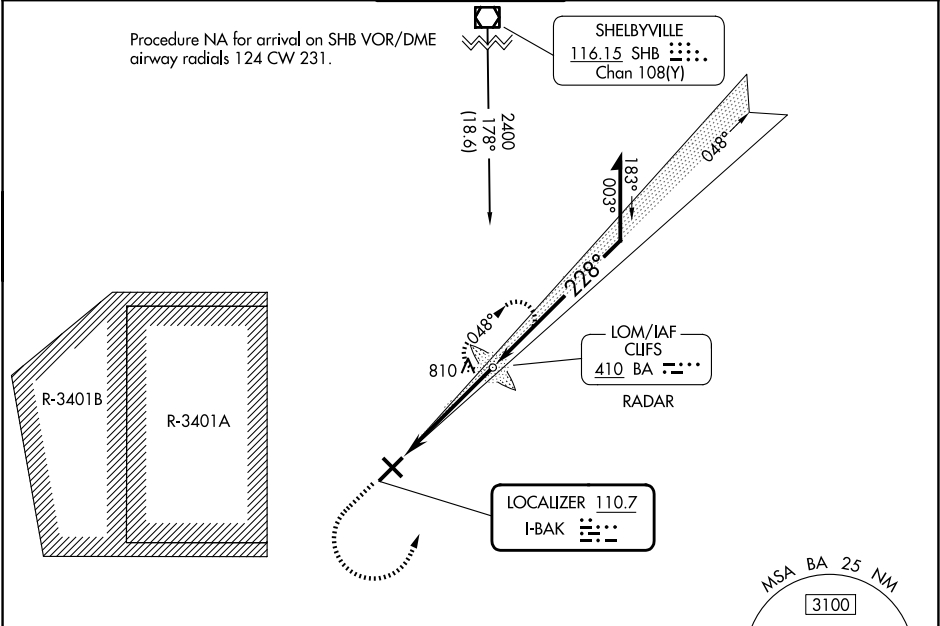

1500 ↑ 2300  BA  BA LOM RADAR 2181 048° 228° 2300 2300 GS 3.00° TCH 51 Remain within 10 NM 4.6 NM				
CATEGORY	A	B	C	D
S-ILS 23	856-1/2 200 (200-1/2)			
S-LOC 23	1060-1/2	404 (500-1/2)	1060-3/4	404 (500-3/4)
CIRCLING	1140-1	484 (500-1)	1200-1/2 544 (600-1/2)	1400-2 1/2 744 (800-2 1/2)