

LOM IA	APP CRS	Rwy Ldg	9129
329	280°	TDZE	588
		Apt Elev	592

NDB RWY 28

NIAGARA FALLS INTL (IAG)

▼

⚠

Circling Rwy 6 NA at night.

Rwy 28 helicopter visibility reduction below RVR 4000 NA.

Circling NA for Cat E southeast of Rwy 6-24.


For inop ALS, increase visibility Cats A/B to RVR to 5500, Cats C/D/E to 1¾ SM.

MALSR



MISSED APPROACH: Climb to 1600 on heading 294° then climbing right turn to 3200 direct KATHI LOM and hold, continue climb-in-hold to 3200.


ATIS	BUFFALO APP CON	NIAGARA TOWER ★	GND CON	UNICOM
120.8 269.4	126.5 317.6	118.5 (CTAF) 0 349.0	125.3 275.8	122.95

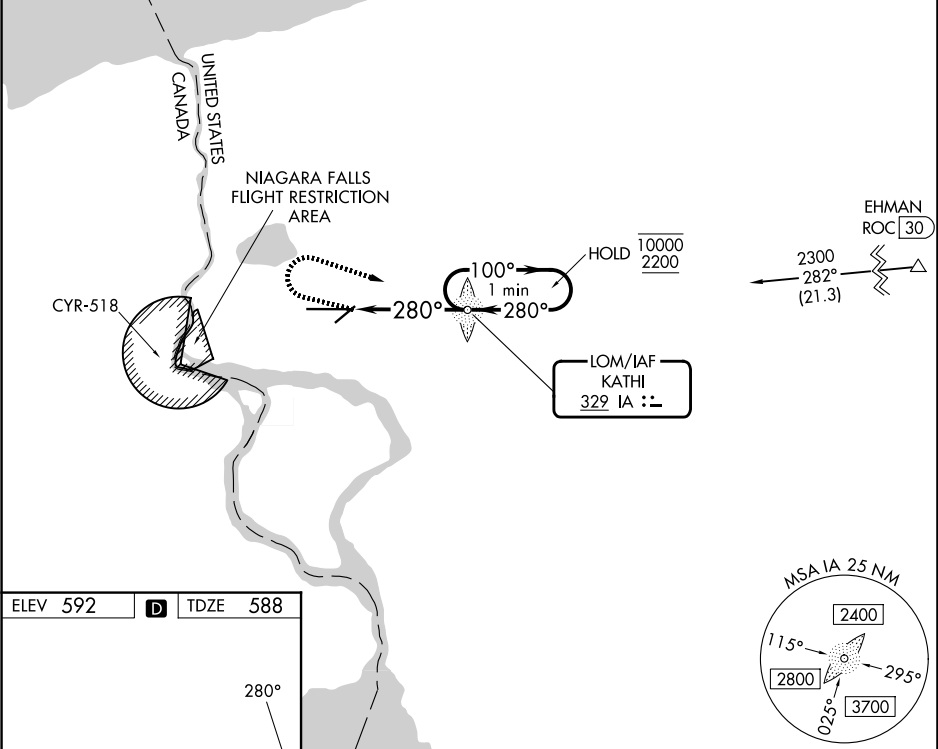

ELEV 592

D

TDZE 588



REIL Rws 6 and 24

TDZL/RCLS Rwy 28

RCLS Rwy 10

HIRL Rwy 10-28

MIRL Rwy 6-24

FAF to MAP 4.1 NM

Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

1600

3200

IA

hdg 294°



IA LOM KATHI

One Minute Holding Pattern

100°

280°

10000

2200

280°

2000

3.10°

TCH 55

4.1 NM

CATEGORY	A	B	C	D	E
S-28	1200/40	612 (700-¾)	1200-1 ¾	612 (700-1 ¾)	
CIRCLING	1200-1	608 (700-1)	1280-2 688 (700-2)	1280-2 ¼ 688 (700-2 ¼)	1280-2 ½ 688 (700-2 ½)