

WAAS CH 42807 W31B	APP CRS 309°	Rwy Ldg 7202 TDZE 593 Apt Elev 612
--	------------------------	---


RNAV (GPS) RWY 31
MUSKOGEE-DAVIS RGNL (MKO)

⚠ For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 47°C (116°F). Baro-VNAV and VDP NA when using Tahlequah altimeter setting. When local altimeter setting not received, use Tahlequah altimeter setting: increase LPV DA to 934, LNAV/VNAV DA to 1230, and visibility LPV and LNAV/VNAV all Cats ¼ SM; increase all MDA 100 feet and visibility LNAV Cat C/D/E and Circling Cat C ¼ SM, and Circling Cat D ½ SM. Inop table does not apply to LNAV/VNAV Cat A/B/C and LNAV Cat C. Circling Rwy 4, 18, 22, 36 NA at night. Rwy 4, 18, 22, 36 helicopter visibility reduction below 1 SM NA.


MALS

MISSED APPROACH:
Climb to 2900 direct
POKYO and hold.

ASOS 135.025	FORT WORTH CENTER 132.2 338.35	UNICOM 122.8 (CTAF) 0
-----------------	-----------------------------------	--------------------------

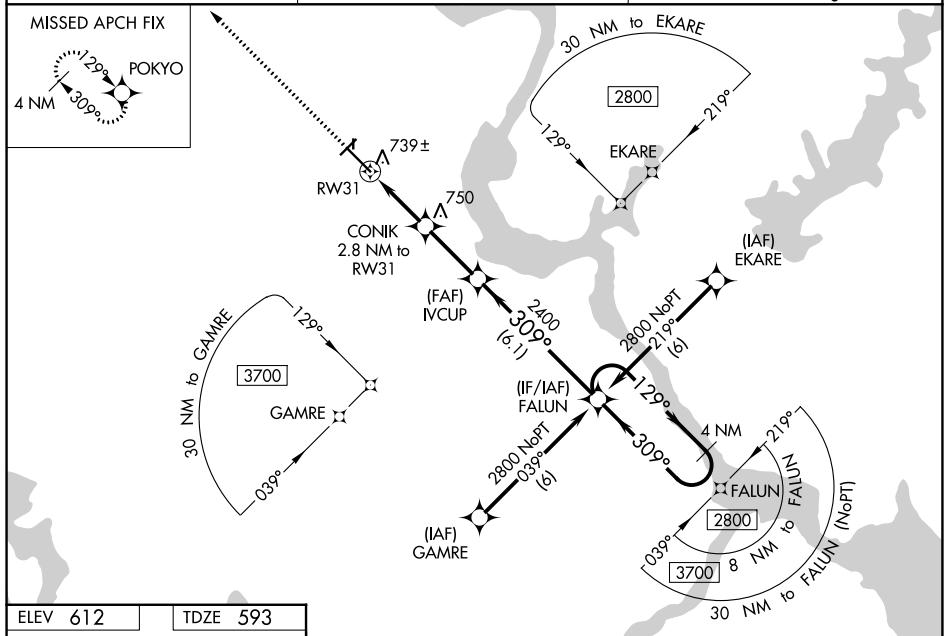

ELEV 612		TDZE 593
----------	--	----------

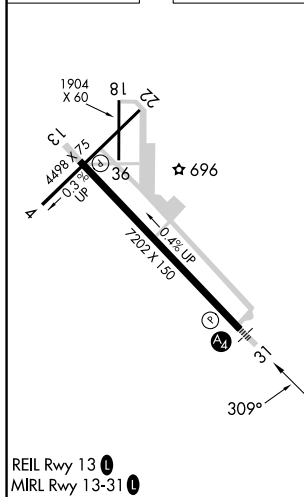

2900 POKYO

*LNAV only.

CONIK 2.8 NM to RW31

IVCUP

FALUN

4 NM Holding Pattern

129° → 2800

← 309°

GP 3.00° TCH 53

1.2 1.6 NM 2.7 NM 6.1 NM

*1.540

*1.2 NM to RW31

RW31

2.400

CATEGORY	A	B	C	D	E
LPV DA	843-1 250 (300-1)				
LNAV/VNAV DA	1139-2 546 (600-2)				
LNAV MDA	1000-3/4 407 (400-3/4)		1000-1 1/4 407 (400-1 1/4)		1000-1 1/2 407 (400-1 1/2)
CIRCLING	1140-1 528 (600-1)	1180-1 568 (600-1)	1320-2 708 (800-2)	1400-2 1/2 788 (800-2 1/2)	1580-3 968 (1000-3)