
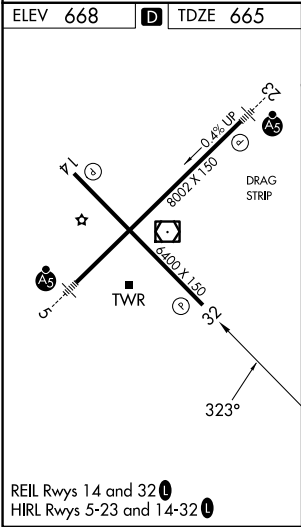


|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>78011</b><br><b>W32A</b> | APP CRS<br><b>323°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>6400</b><br><b>665</b><br><b>668</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 32  
MBS INTL (MBS)

|                                                                                |                                        |                                        |                                                       |                  |
|--------------------------------------------------------------------------------|----------------------------------------|----------------------------------------|-------------------------------------------------------|------------------|
| RNP APCH.                                                                      |                                        |                                        | MISSED APPROACH: Climb to 2300 direct OGREE and hold. |                  |
| ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. |                                        |                                        |                                                       |                  |
| ATIS<br>125.925                                                                | GREAT LAKES APP CON★<br>126.45 235.625 | SAGINAW TOWER★<br>120.1 (CTAF) 0 257.7 | GND CON<br>121.7                                      | UNICOM<br>122.95 |

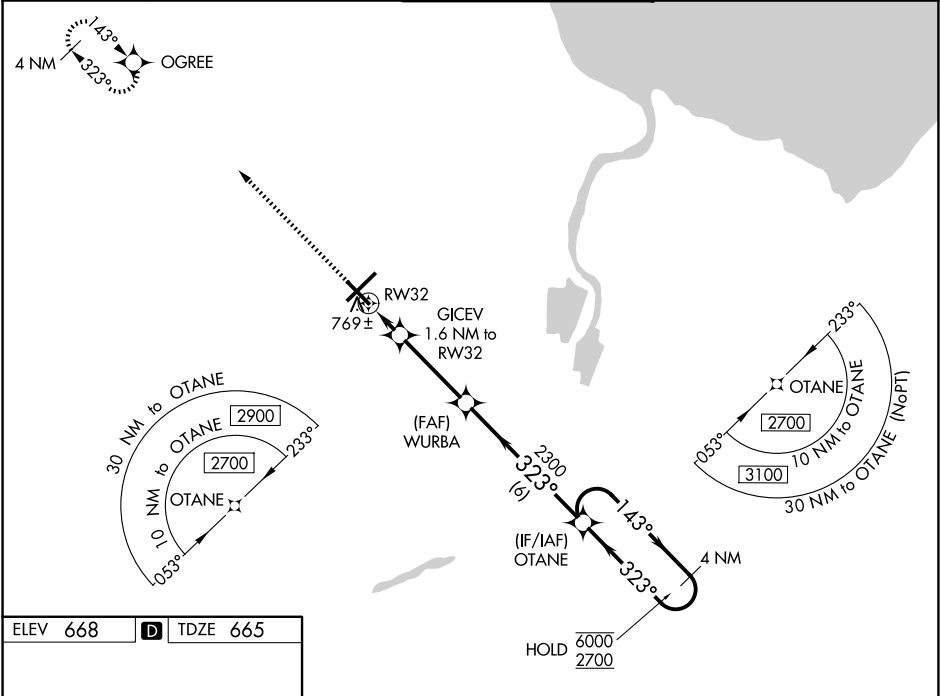

|              |  |                            |  |
|--------------|--|----------------------------|--|
| 2300 OGREE   |  | 4 NM Holding Pattern       |  |
| *LNAV only.  |  | OTANE                      |  |
| RW32         |  | 143° → 6000<br>← 323° 2700 |  |
| 1 NM         |  | GP 3.00°<br>TCH 50         |  |
| CATEGORY     |  | A                          |  |
| LPV DA       |  | 865-3/4 200 (200-3/4)      |  |
| LNAV/VNAV DA |  | 950-7/8 285 (300-7/8)      |  |
| LNAV MDA     |  | 1020-1 355 (400-1)         |  |
| CIRCLING     |  | 1080-1 412 (500-1)         |  |
|              |  | 1120-1 452 (500-1)         |  |
|              |  | 1240-1 572 (600-1 1/2)     |  |
|              |  | 1240-2 572 (600-2)         |  |