


WAAS CH 82010 W05A	APP CRS 053°	Rwy Ldg TDZE Apt Elev	8002 666 668
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 5

MBS INTL (MBS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSR	MISSED APPROACH: Climb to 2300 direct FOROX and hold.
ATIS 125.925	GREAT LAKES APP CON★ 126.45 235.625	SAGINAW TOWER★ 120.1 (CTAF) 0 257.7	GND CON 121.7	UNICOM 122.95

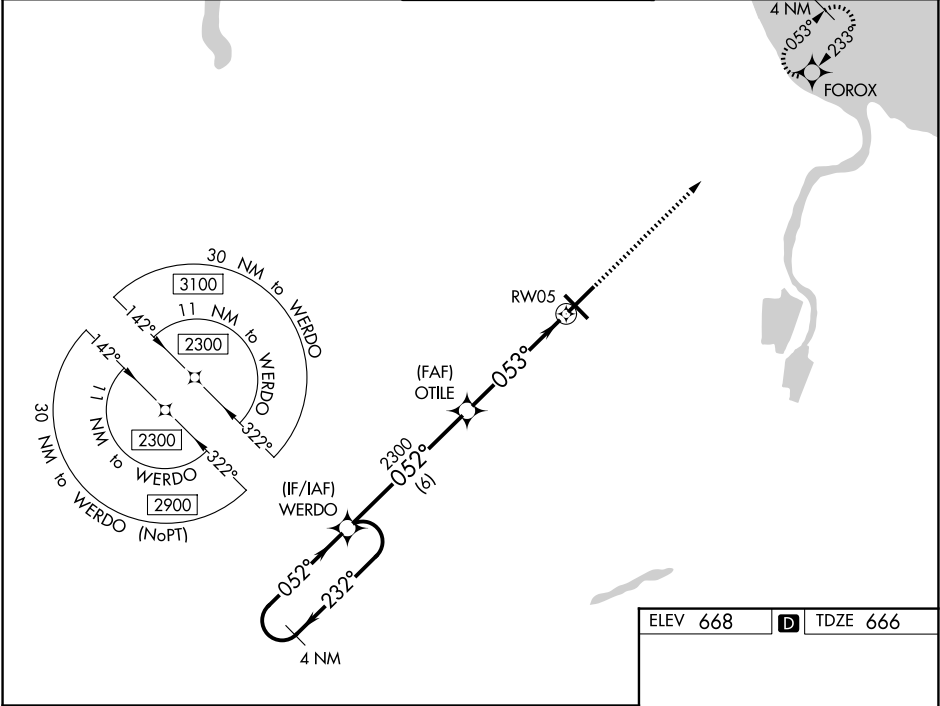

4 NM Holding Pattern WERDO OTILE 2300 FOROX GP 3.00° TCH 50 2300 ← 232° → 052° → 052° → 2300 6 NM 3.9 NM 1.1 NM * 1.1 NM to RW05 * LNAV only.				
CATEGORY	A	B	C	D
LPV DA**	866/24 200 (200-½)			
LNAV/ VNAV DA	955/24 289 (300-½)			
LNAV MDA	1080/24	414 (500-½)	1080/40	414 (500-¾)
CIRCLING	1080-1 412 (500-1)	1120-1 452 (500-1)	1240-1½ 572 (600-1½)	1240-2 572 (600-2)

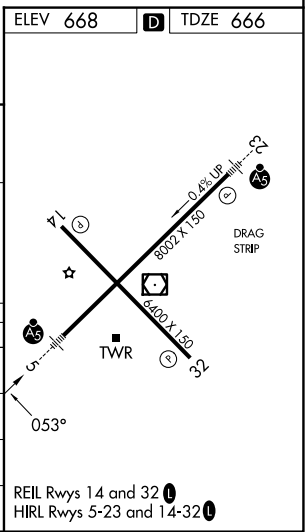

EC-1, 03 SEP 2026 to 01 OCT 2026

EC-1, 03 SEP 2026 to 01 OCT 2026