


(LWM2.LWM) 29DEC22

LAWRENCE TWO DEPARTURE

LAWRENCE, MASSACHUSETTS
LAWRENCE MUNI (LWM)

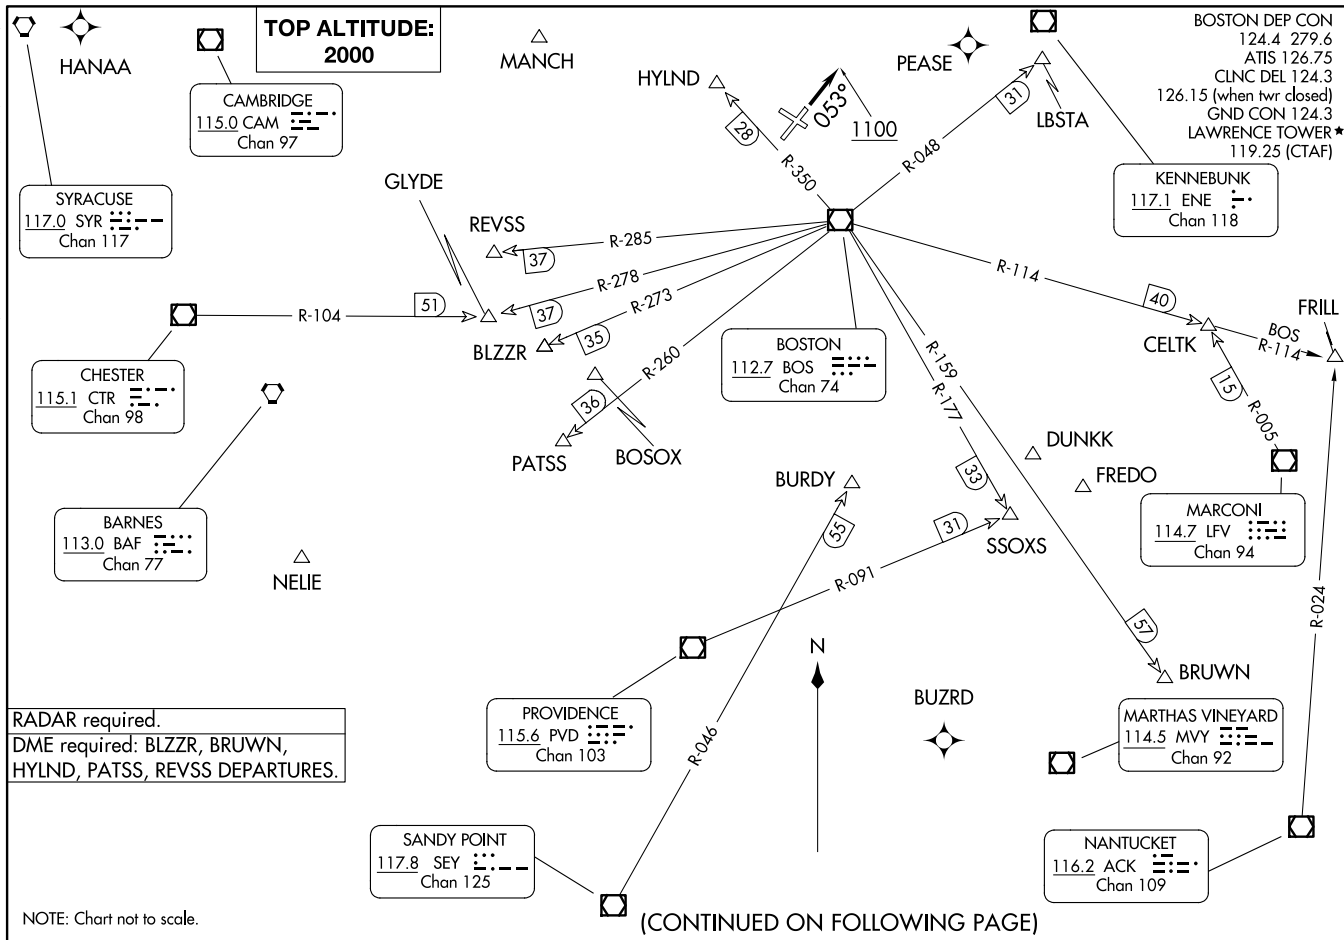

(CONTINUED ON FOLLOWING PAGE)

(LWM2.LWM) 26246

AL-654 (FAA)

LAWRENCE MUNI (LWM)
LAWRENCE, MASSACHUSETTS



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 5: Climb on heading 053° to 1100, then as assigned by ATC, thence....
TAKEOFF RUNWAYS 14, 23, 32: Climb on heading as assigned by ATC, thence....
....expect RADAR vectors to assigned route/navaid/fix. Maintain 2000.
Expect filed altitude/flight level 10 minutes after departure.

TAKEOFF MINIMUMS:

Rwy 5: 300-1½ or standard with minimum climb of 435’ per NM to 500.
Rwy 14: 300-1 or standard with minimum climb of 625’ per NM to 600.
Rwy 23: 300-1 or standard with minimum climb of 350’ per NM to 400.
Rwy 32: Standard.

- NOTE: Non RNAV equipped aircraft can expect vectors on assigned route.
NOTE: BLZZR DEPARTURES expect vectors on BOS R-273.
NOTE: BRUWN DEPARTURES expect vectors on BOS R-159.
NOTE: CELTK DEPARTURES expect vectors on BOS R-114.
NOTE: HYLND DEPARTURES expect vectors on BOS R-350.
NOTE: PATSS DEPARTURES expect vectors on BOS R-260.
NOTE: REVSS DEPARTURES expect vectors on BOS R-285.
NOTE: SSOXS DEPARTURES expect vectors on BOS R-177.