

APP CRS	Rwy Ldg	12000
276°	TDZE	875
	Apt Elev	896

RNAV (RNP) Z RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP AR APCH - GPS. Authorization required. From FIBSU or ZALD: RF.


▼

For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500, increase RNP 0.3 all Cats visibility to 1 1/2 SM.

MALSR

MISSED APPROACH: Climb to 3000 direct SEMSE and on track 225° to AVIEW and hold.

D-ATIS	CINCINNATI APP CON	CINCINNATI TOWER	GND CON
134.375	119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	121.7

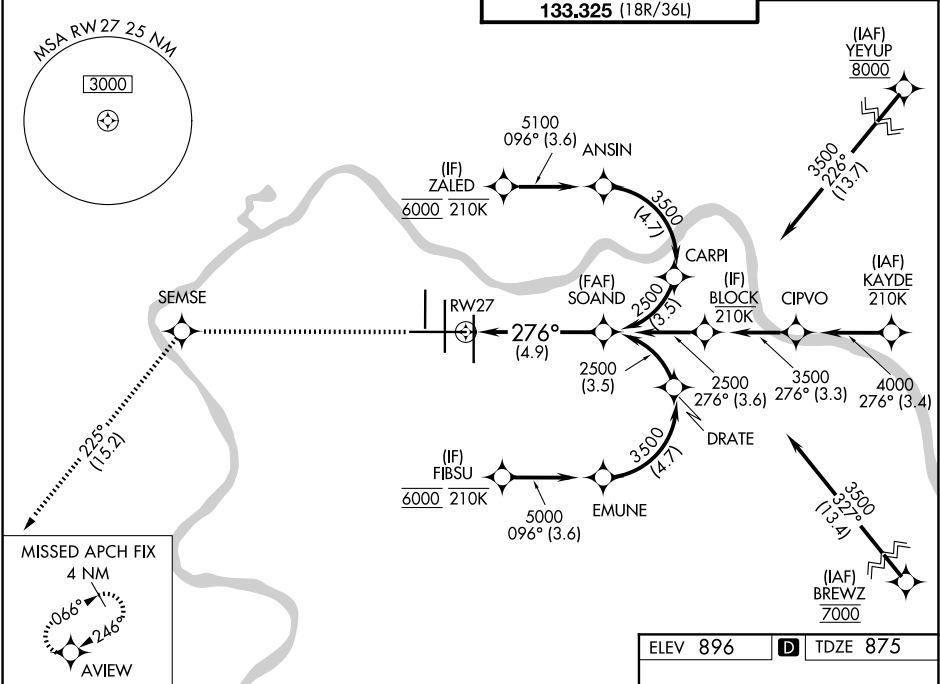

3000

SEMSE

tr 225°

AVIEW

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.15 DA		1244/35	369 (400-%)	
RNP 0.23 DA		1260/35	385 (400-%)	
RNP 0.30 DA		1364/50	489 (500-1)	

AUTHORIZATION REQUIRED

ELEV 896 **D** TDZE 875

HIRL all rwys
TDZL/RCLS all rwys except 27