

APP CRS
096°

Rwy Ldg
11640

TDZE
883

Apt Elev
896

RNAV (RNP) Z RWY 9

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)


RNP AR APCH - GPS. Authorization required. From FLOTT or IDULE: RF.

MALSR

MISSED APPROACH: Climb to 3000 direct BLOCK and on track 138° to CALIF and hold.

For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C.

D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	GND CON 121.7
--------------------------	--	---	-------------------------

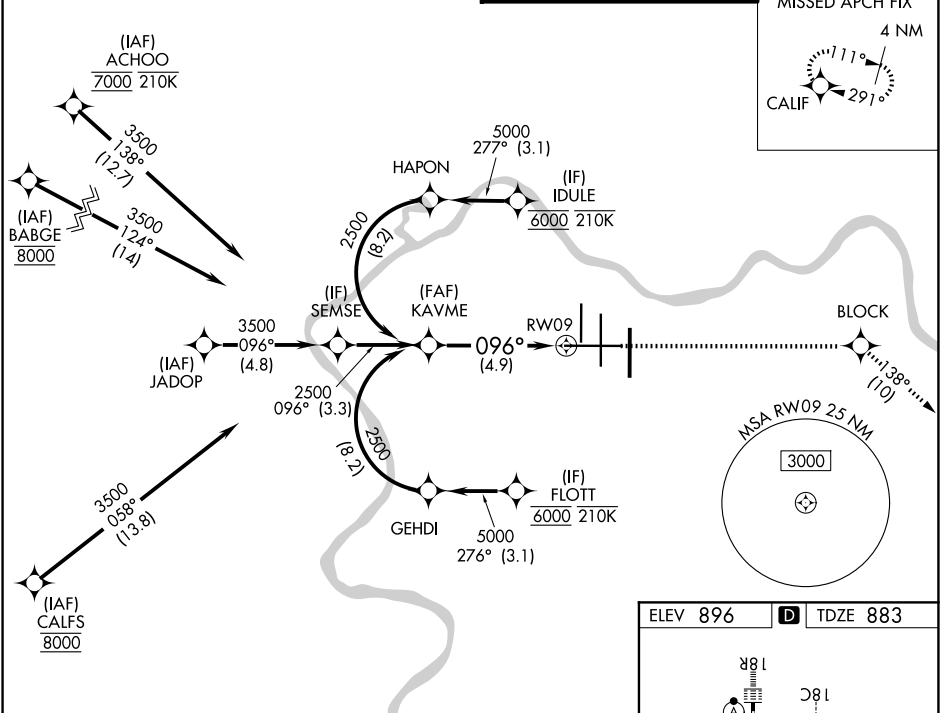

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

KAYME
2500

GP 3.00°
TCH 52

See planview for multiple IF locations.

4.9 NM

CATEGORY	A	B	C	D
RNP 0.18 DA		1205/26	322 (400-½)	
RNP 0.30 DA		1275/35	392 (400-¾)	

AUTHORIZATION REQUIRED

ELEV 896 TDZE 883

HIRL all rwys
TDZL/RCLS all rwys except 27