

WAAS CH 81912 W06A	APP CRS 059°	Rwy Ldg 5765 TDZE 38 Apt Elev 47
--	------------------------	---

RNAV (GPS) RWY 6
NANTUCKET MEML (ACK)

RNP APCH - GPS.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS increase LNAV/VNAV visibility all Cats to RVR 4500, and LNAV visibility all Cats to RVR 5500. Inop table does not apply to LPV.





MALSF



MISSED APPROACH:
Climb to 1800 direct
WAIVS and hold,
continue climb
in hold to 1800.

ATIS 127.5	BOSTON APP CON 126.1 318.1	NANTUCKET TOWER ★ 118.3 (CTAF) 0	GND CON 132.5	UNICOM 122.95
----------------------	--------------------------------------	--	-------------------------	-------------------------

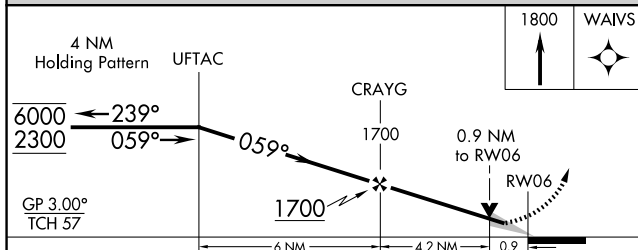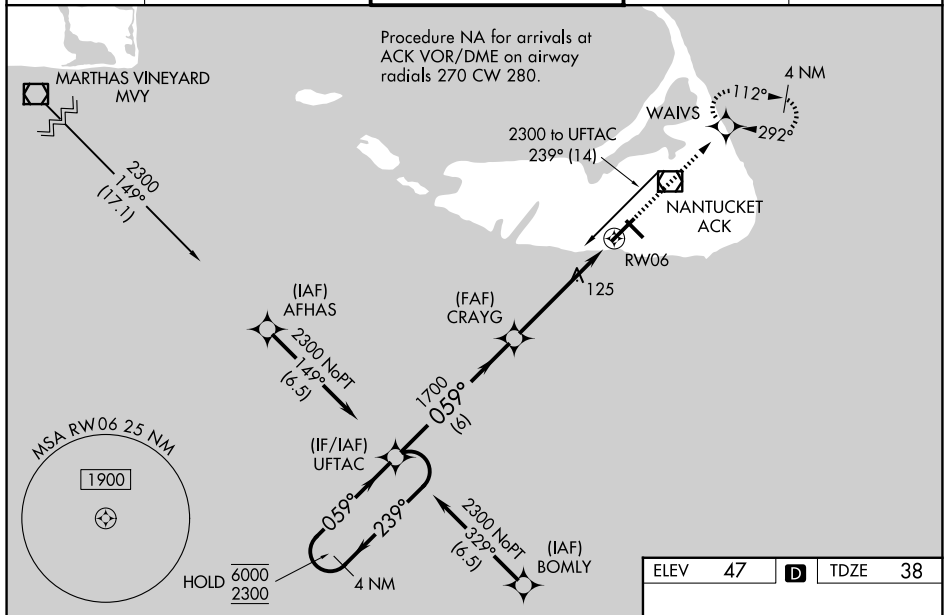

CATEGORY	A	B	C	D
LPV DA	238/40 200 (200-¾)			
LNAV/ VNAV DA	300/40 262 (300-¾)			
LNAV MDA	380/40 342 (400-¾)			
CIRCLING	480-1 433 (500-1)	500-1 453 (500-1)	720-2 673 (700-2)	720-2¼ 673 (700-2¼)

