

APP CRS	Rwy Ldg	9020
172°	TDZE	4457
	Apt Elev	4457

RNAV (GPS) RWY 17

LOGAN-CACHE (LGU)

RNP APCH - GPS

▼

⚠


⚡ -14°C

Rwy 17 helicopter visibility reduction below ¾ SM NA. Use LGU altimeter setting; when not received, procedure NA. Circling Rwy 10, 28 NA at night. Inop table does not apply to RNAV Cats C and D. Circling NA east of Rwy 17-35. For inop ALS, increase RNAV* Cats A and B visibility to 1 SM.

MALSR

MISSED APPROACH: Climbing right turn to 10000 direct PIME and hold, continue climb-in-hold to 10000.
* Missed approach requires minimum climb of 310 feet per NM to 7700.

ASOS 135.275	SALT LAKE CENTER 127.7 354.125	UNICOM 122.8 (CTAF)
-----------------	-----------------------------------	------------------------

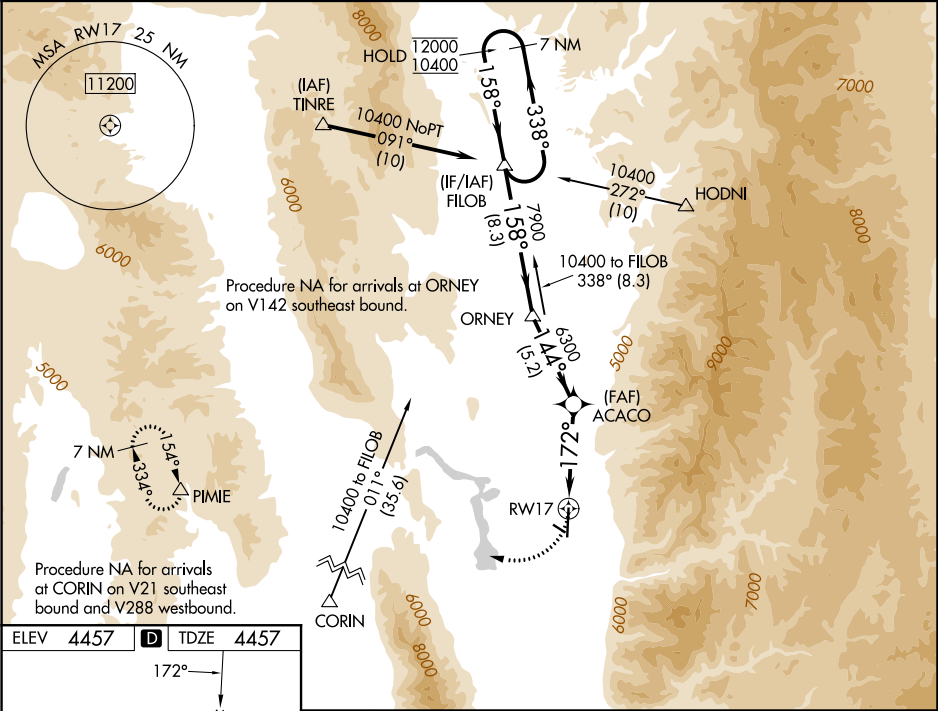

ELEV 4457 TDZE 4457

172°

100 X 206

4075 X 60

REIL Rwy 35

HIRL Rwy 17-35

10000

PIME

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 45).

7 NM Holding Pattern

ACACO

ORNEY

FILOB

338° → 12000

← 158° 10400

1.9 NM to RW17

3.00° TCH 50

172°

6300

1.9

3.8 NM

5.2 NM

8.3 NM

CATEGORY	A	B	C	D
LNAV MDA*	5100-¾ 643 (700-¾)		5100-1⅓ 643 (700-1⅓)	
LNAV MDA	5800-¾ 1343 (1400-¾)	5800-1 1343 (1400-1)	5800-3 1343 (1400-3)	
CIRCLING	5800-1¼ 1343 (1400-1¼)	5800-1½ 1343 (1400-1½)	5800-3 1343 (1400-3)	