



|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>86841</b><br><b>W30A</b> | APP CRS<br><b>306°</b> | Rwy Ldg<br>TDZE <b>657</b><br>Apt Elev <b>684</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 30

IOWA CITY MUNI (IOW)

|                                                                                                                                                                                                                                                                                                                                       |                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                                                                                                                                                                                       | MISSED APPROACH: Climb to 1800 then climbing left turn to 3000 direct IOW VOR/DME and hold. |
| <div><div></div><div>Rwy 30 helicopter visibility reduction below 1 SM NA. Rwy 30 procedure NA at night. Circling Rwy 12 NA at night. When local altimeter setting not received, use CID altimeter setting and increase all MDA 80 feet and LNAV visibility Cat C/D 1/8 SM and LP and Circling Cat C/D visibility 1/4 SM.</div></div> |                                                                                             |

|                        |                                              |                           |                                 |
|------------------------|----------------------------------------------|---------------------------|---------------------------------|
| ASOS<br><b>128.075</b> | CEDAR RAPIDS APP CON ★<br><b>119.7 266.8</b> | CLNC DEL<br><b>119.05</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|------------------------|----------------------------------------------|---------------------------|---------------------------------|

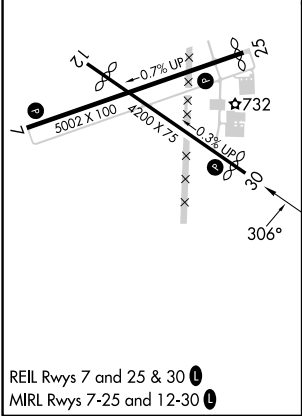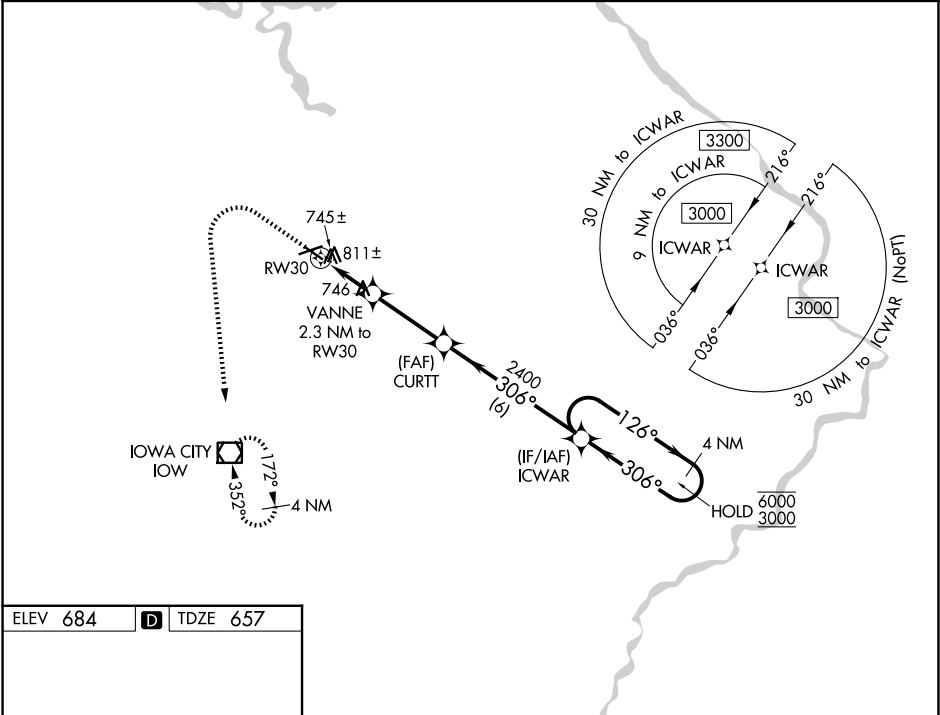

|                                                                                     |                                                                                     |                                                                                     |                                                                     |                            |                         |      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|----------------------------|-------------------------|------|
| 1800                                                                                | 3000                                                                                | IOW                                                                                 | VGSI and descent angles not coincident<br>(VGSI Angle 3.50/TCH 38). |                            |                         |      |
|  |  |  | CURTT                                                               |                            | ICVAR                   |      |
|                                                                                     |                                                                                     | VANNE<br>2.3 NM to<br>RW30                                                          |                                                                     | 4 NM<br>Holding Pattern    |                         |      |
|                                                                                     |                                                                                     | $\leq 3.00^\circ$<br>TCH 40                                                         |                                                                     | 126° → 6000<br>← 306° 3000 |                         |      |
|                                                                                     |                                                                                     | RW30                                                                                |                                                                     | 2400                       |                         |      |
|                                                                                     |                                                                                     | 1400                                                                                |                                                                     | 2400                       |                         |      |
|                                                                                     |                                                                                     | 2.3 NM                                                                              |                                                                     | 3.1 NM                     |                         | 6 NM |
| CATEGORY                                                                            | A                                                                                   |                                                                                     | B                                                                   |                            | C                       |      |
| LP MDA                                                                              | 1000-1 343 (400-1)                                                                  |                                                                                     |                                                                     |                            |                         |      |
| LNAV MDA                                                                            | 1080-1 423 (400-1)                                                                  |                                                                                     |                                                                     | 1080-1¼ 423 (400-1¼)       |                         |      |
| CIRCLING                                                                            | 1220-1<br>536 (600-1)                                                               |                                                                                     | 1240-1<br>556 (600-1)                                               |                            | 1440-2¼<br>756 (800-2¼) |      |
|                                                                                     |                                                                                     |                                                                                     |                                                                     |                            | 1440-2½<br>756 (800-2½) |      |