

WAAS CH 40430 W06A	APP CRS 056°	Rwy Ldg TDZE Apt Elev	5000 405 407
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6


OWENSBORO/DAVIESS COUNTY RGNL (OWB)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Rwy 6 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Evansville altimeter setting: increase LPV DA to 719 feet and all Cats visibility ¾ mile; increase LNAV/VNAV DA to 734 feet and all Cats visibility ¾ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cats C/D visibility ¾ mile. Baro-VNAV and VDP NA when using Evansville altimeter setting.

MISSED APPROACH:
Climb to 3000 direct CINU and hold.

AWOS-3PT 119.025	EVANSVILLE APP CON ★ 124.025 290.9	OWENSBORO TOWER ★ 120.7 (CTAF) 251.15	GND CON 121.7	UNICOM 122.95
----------------------------	--	---	-------------------------	-------------------------

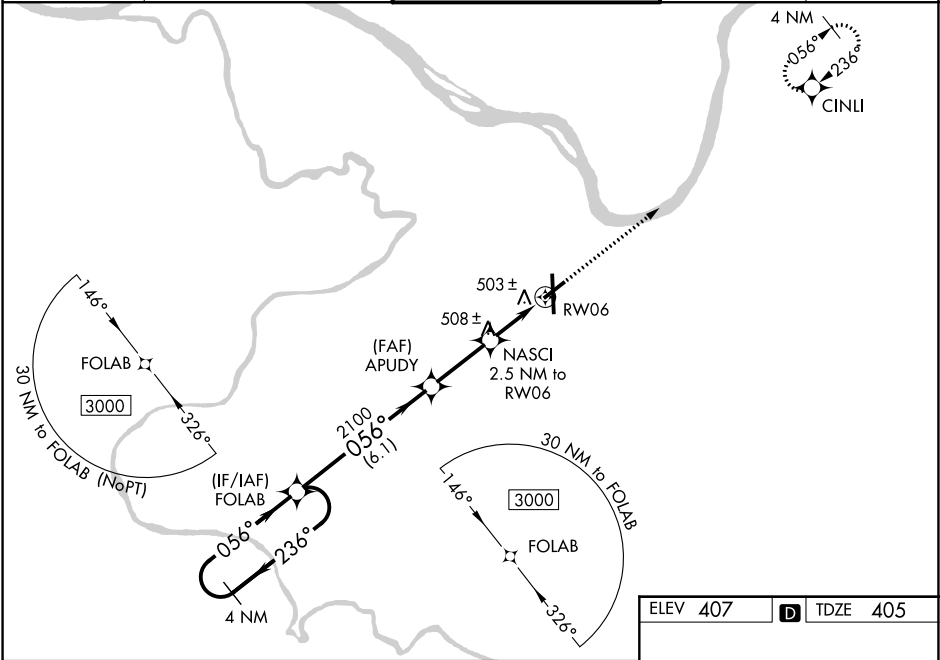

4 NM Holding Pattern

FOLAB

APUDY

NASCI 2.5 NM to RWY 06

3000 CINU

3000 ← 236°

056° →

056°

2100

* 1240

1.1 NM to RWY 06

RWY 06

GP 3.00° TCH 45

6.1 NM

2.7 NM

1.4

1.1

CATEGORY	A	B	C	D
LPV DA		660- ⁷ / ₈	255 (300- ⁷ / ₈)	
LNAV/VNAV DA		675- ⁷ / ₈	270 (300- ⁷ / ₈)	
LNAV MDA	800-1	395 (400-1)	800-1 ¹ / ₈	395 (400-1 ¹ / ₈)
CIRCLING	860-1 453 (500-1)	1120-1 713 (800-1)	1140-2 733 (800-2)	1140-2 ¹ / ₄ 733 (800-2 ¹ / ₄)

ELEV 407

TDZE 405

81

8000 X 150

TWR

5000 X 100

36

056°

MIRL Rwy 6-24

HIRL Rwy 18-36

REIL Rws 6, 18, and 24