



WAAS CH 45738 W36A	APP CRS 360°	Rwy Ldg TDZE 678 Apt Elev 682
--	------------------------	---

RNAV (GPS) RWY 36
DECATUR (DEC)

RNP APCH.		DECATUR TOWER* 118.9(CTAF) 0 291.775		GND CON 121.75 291.775	UNICOM 122.95
Baro-VNAV and VDP NA when using Lincoln altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Lincoln altimeter setting and increase all DA/MDA 80 feet, increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ¼ SM, LNAV Cat C/D and Circling Cat C/D visibility ¾ SM.				MISSED APPROACH: Climb to 3100 direct HEPAX and hold.	
ATIS 126.35	CHAMPAIGN APP CON* 132.85 290.225				

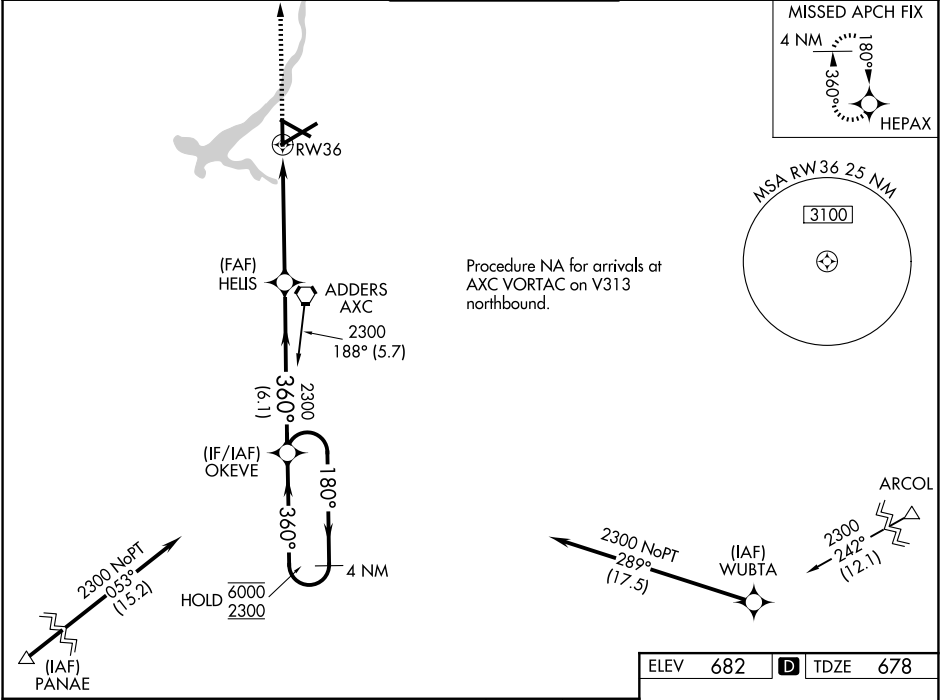

4 NM Holding Pattern		OKEVE	HELIS	3100	HEPAX
6000 2300		180° 360°	360° 2300	*1.4 NM to RW36	*LNAV only
GP 3.00° TCH 58		6.1 NM	3.5 NM	1.4 NM	
CATEGORY	A	B	C	D	
LPV DA	984-7/8		306 (400-7/8)		
LNAV/VNAV DA	1082-1 1/8		404 (400-1 1/8)		
LNAV MDA	1180-1	502 (500-1)	1180-1 3/8	502 (500-1 3/8)	
CIRCLING	1180-1 498 (500-1)	1240-1 558 (600-1)	1360-2 678 (700-2)	1360-2 1/4 678 (700-2 1/4)	

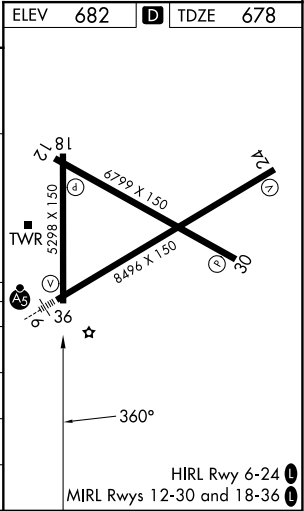

EC-3, 03 SEP 2026 to 01 OCT 2026

EC-3, 03 SEP 2026 to 01 OCT 2026