

WAAS CH 50310 W01A	APP CRS 007°	Rwy Ldg TDZE 685 Apt Elev 690
--	------------------------	---

RNAV (GPS) RWY 1
ALPENA COUNTY RGNL (APN)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using PZQ altimeter setting. For inop ALS, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1 SM and LNAV Cats C/D visibility to 1 ¾ SM. When local altimeter setting not received, use PZQ altimeter setting and increase LPV DA to 1029 feet and all visibilities ¾ SM; increase LNAV/VNAV DA to 1084 feet; increase all MDA 60 feet. For inop ALS when using PZQ altimeter setting, increase LPV all Cats visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 3500 direct HIMVO and on track 307° to RABBO and hold.

ATIS 120.675 327.05	ALPENA APP CON ★ 128.425 379.3	ALPENA TOWER ★ 121.35 (CTAF) 0 318.1	GND CON 121.9 275.8	UNICOM 122.95
-------------------------------	--	--	-------------------------------	-------------------------

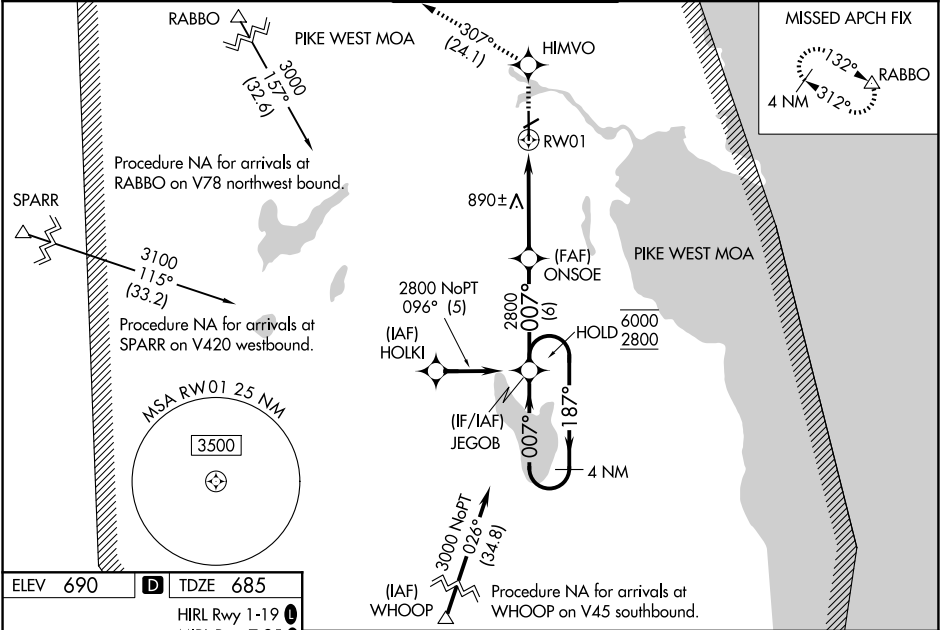

ELEV 690

TDZE 685

HIRL Rwy 1-19

MIRL Rwy 7-25

REIL Rws 7, 19 and 25

61

5028 X 100

900 X 150

007°

	4 NM	JEGOB	ONSOE	3500	HIMVO	tr 307°	RABBO
	Holding Pattern		2800				
	6000 2800	187° 007°	007°	2800	1.3 NM to RW01	RW01	
	GP 3.00° TCH 52	6 NM	5 NM	1.3			
CATEGORY	A	B	C	D			
LPV DA	974-1½		289 (300-½)				
LNAV/VNAV DA	1029-⅝		344 (400-⅝)				
LNAV MDA	1160-1½	475 (500-½)	1160-1	475 (500-1)			
CIRCLING	1160-1	470 (500-1)	1220-1½ 530 (600-1½)	1300-2 610 (700-2)			

EC-1, 03 SEP 2026 to 01 OCT 2026

EC-1, 03 SEP 2026 to 01 OCT 2026