

WAAS CH 82746	APP CRS 067°	Rwy Ldg TDZE 690 Apt Elev 690
-------------------------	------------------------	---

RNAV (GPS) RWY 7

ALPENA COUNTY RGNL (APN)

RNP APCH - GPS.



▼

⚠

Baro-VNAV and VDP NA when using PZQ altimeter setting. Rwy 7 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use PZQ altimeter setting and increase LPV DA to 1007 feet, increase LNAV/VNAV DA to 1039 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct MUNCN and hold, continue climb-in-hold to 3000.

ATIS ★ 120,675 327,05	ALPENA APP CON ★ 128,425 379,3	ALPENA TOWER ★ 121,35 (CTAF) 0 318,1	GND CON 121,9 275,8	UNICOM 122,95
---------------------------------	--	--	-------------------------------	-------------------------

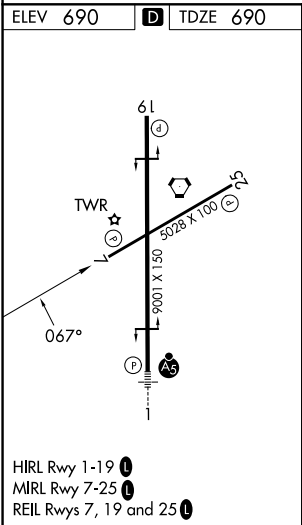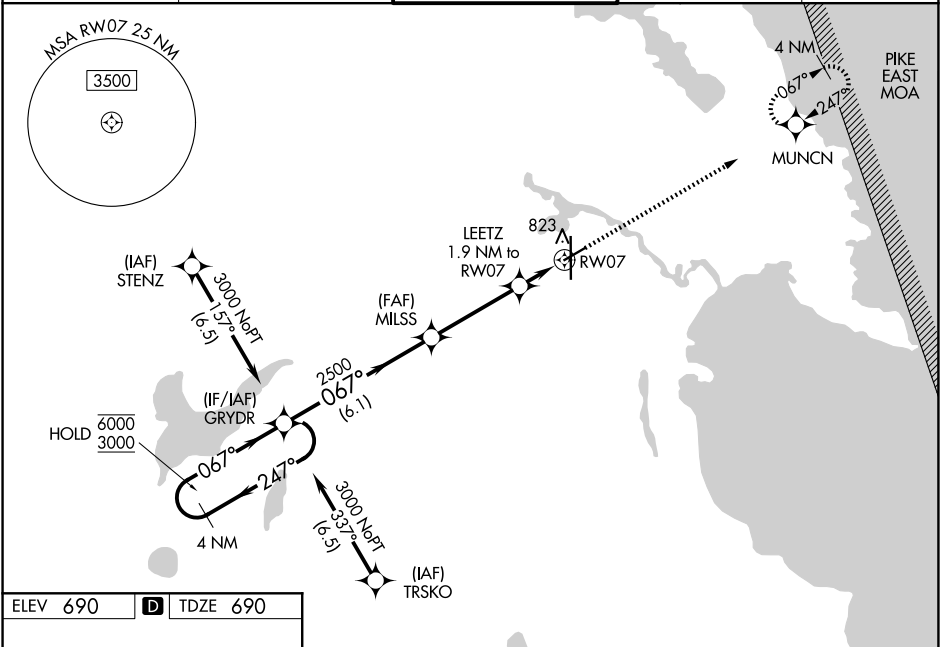

4 NM

Holding Pattern

6000

3000

← 247°

→ 067°

GP 3.00°

TCH 58

GRYDR

MILSS

2500

1340

VGSI and RNAV glidepath not coincident

(VGSI Angle 3.00/TCH 49).

LEETZ

1.9 NM to RW07

1.1 NM to RW07

RW07

6.1 NM

3.6 NM

0.8

1.1

3000

MUNCN

CATEGORY	A	B	C	D
LPV DA	952-1		262 (300-1)	
LNAV/VNAV DA	984-1		294 (300-1)	
LNAV MDA	1080-1	390 (400-1)	1080-1½	390 (400-1½)
CIRCLING	1140-1	450 (500-1)	1220-1½ 530 (600-1½)	1300-2 610 (700-2)