

LOC/DME I-LOZ 110.9 Chan 46	APP CRS 057°	Rwy Ldg TDZE 1212 Apt Elev 1212	ILS or LOC RWY 6 LONDON/CORBIN/MAGEE (I/OZ)
---	------------------------	---	--


▼

▲

Visibility reduction by helicopters NA. VDP NA when using Somerset altimeter setting. When local altimeter setting not received, use Somerset altimeter setting: increase DA to 1562 feet and all visibility ¼ SM; increase all MDAs 100 feet and S-LOC 6 Cat C ¼ SM, Cat D ½ SM, Circling Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 direct LOZ VOR/DME and hold, continue climb-in-hold to 4000.

ASOS 119.075	INDIANAPOLIS CENTER 124.625 371.925	UNICOM 123.0 (CTAF) 1
------------------------	---	--

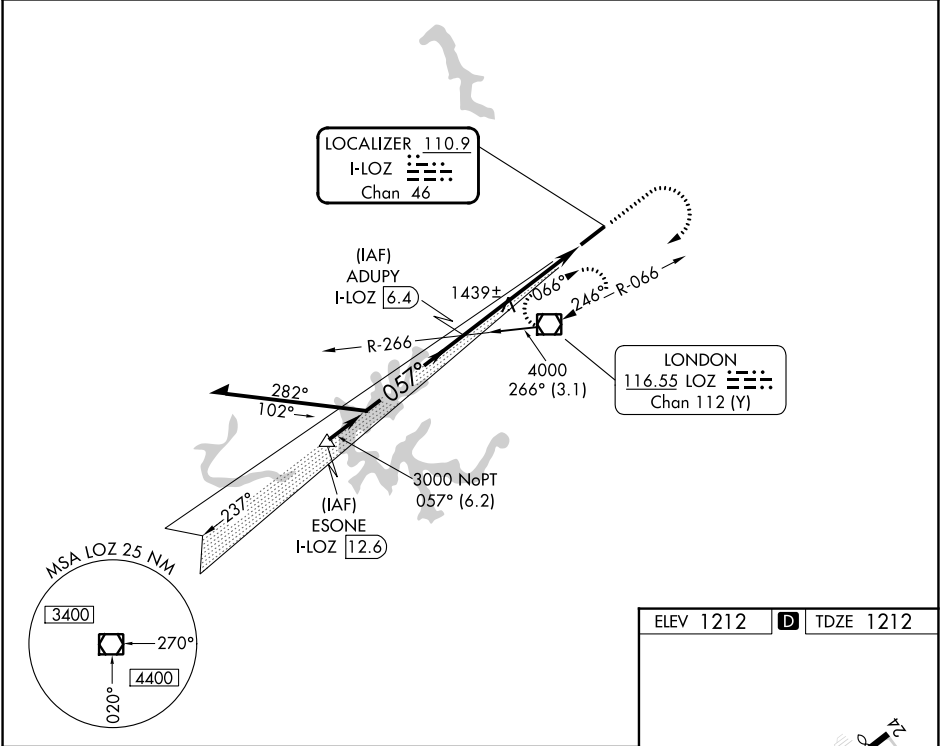

Remain within 10 NM

ADUPY I-LOZ 6.4

2000 4000 LOZ

3500 237° 3000 057° 3000 057°

GS 3.00° TCH 49

4 NM 1.4 NM

CATEGORY	A	B	C	D
S-ILS 6		1462-1	250 (300-1)	
S-LOC 6	1720-1	508 (600-1)	1720-1½	508 (600-1½)
CIRCLING	1780-1 568 (600-1)	2040-1¼ 828 (900-1¼)	2040-2½ 828 (900-2½)	2040-2¾ 828 (900-2¾)

ELEV 1212 TDZE 1212

MIRL Rwy 6-24

REIL Rws 6 and 24

FAF to MAP 5.4 NM

Knots

60 90 120 150 180

Min:Sec

5:24 3:36 2:42 2:10 1:48

057°

0 5% UP

5750 x 180