

LOC I-MWO <u>111.1</u>	APP CRS 233°	Rwy Ldg 5801 TDZE 650 Apt Elev 651
----------------------------------	------------------------	---

LOC RWY 23
MIDDLETOWN RGNL/HOOK FLD (MWO)


ADF required.

T Rwy 23 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Circling NA to Rwy 8 and 26.
A NA Circling Rwy 5 NA at night. When local altimeter not received use MGY altimeter setting, increase all MDAs 80 feet and S-LOC 23 visibility Cats C and D $\frac{1}{4}$ SM.


MISSED APPROACH: Climb to 2600 then climbing left turn to 3000 direct ONIDA LOM and hold.

AWOS-3PT
120.025

COLUMBUS APP CON
118.85 269.275

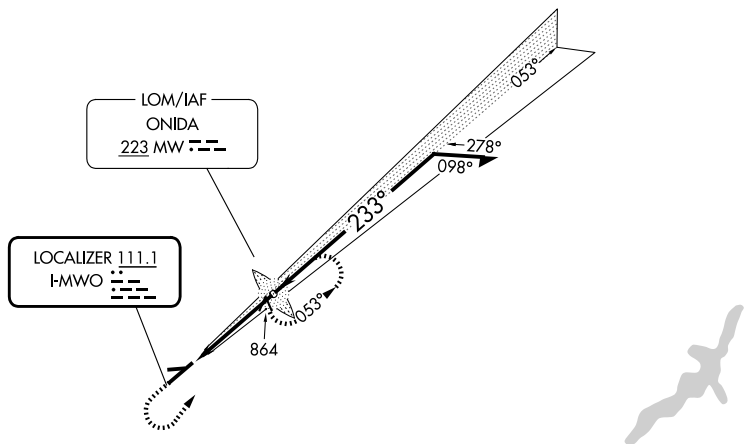UNICOM
123.0 (CTAF) **L**

ELEV 651		TDZE 650
----------	--	----------



MIRL Rwy 5-23 **L**
REIL Rwy 5 and 23 **L**

FAF to MAP 3.9 NM

Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18

2600 3000 MW

VGS and descent angles not coincident (VGS Angle 3.00/TCH 26).

MW LOM

053°

Remain within 10 NM

3100

233°

2000

3.14° TCH 45

3.9 NM

CATEGORY	A	B	C	D
S-LOC 23	1140-1	490 (500-1)	1140-1 $\frac{3}{8}$ 490 (500-1 $\frac{3}{8}$)	1140-1 $\frac{1}{2}$ 490 (500-1 $\frac{1}{2}$)
CIRCLING	1380-1	729 (800-1)	1720-3 1069 (1100-3)	1840-3 1189 (1200-3)

MIDDLETOWN, OHIO

Amdt 7L 02OCT25

MIDDLETOWN RGNL/HOOK FLD (MWO)

39°32'N-84°24'W

LOC RWY 23