

26078



RNAV (GPS) RWY 17L
WILEY POST (PWA)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or
A above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM
 Δ SR and LNAV Cat C/D visibility to 1 SM.



MISSED APPROACH: Climb to 1700 then climbing right turn to 3400 direct BSKT and hold.

ATIS 128.725	OKE CITY APP CON 124.6 266.8	WILEY POST TOWER ★ 126.9 (CTAF) 0 306.9	GND CON 121.7	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

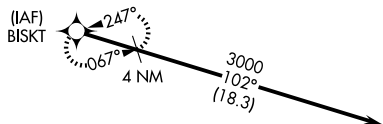

(IF)
WABDU


3000
—175
(5.1)

(FAF)
ZOVUM

RW17L (

109±

REIL Rwy's 17R and 35L **L**
 HIRL Rwy 17L-35R **L**
 MIRL Rwy's 13-31 and 17R-35L **L**

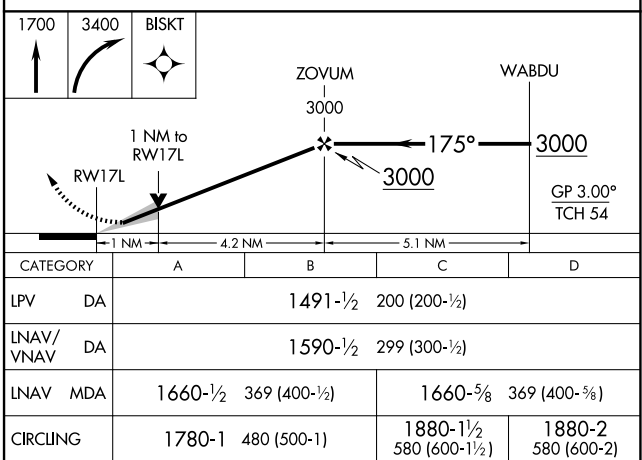

WILEY POST (PWA)

RNAV (GPS) RWY 17L

SC-1, 03 SEP 2026 to 01 OCT 2026