


|         |          |       |
|---------|----------|-------|
| APP CRS | Rwy Ldg  | 10801 |
| 191°    | TDZE     | 991   |
|         | Apt Elev | 1027  |

RNAV (RNP) Z RWY 19R

KANSAS CITY INTL (MCI)

|                                                                                 |                                                                                                                                                                                                                                                                                  |                                                                                             |                                                                                        |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| RADAR required for procedure entry. RNP AR APCH - GPS.                          |                                                                                                                                                                                                                                                                                  | ALSF-2<br> | MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 direct RUGBB and hold. |
|  | For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. Simultaneous approach authorized, except for arrivals at BUZZR, HOLMS, SCIPR, and KAALA. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility RVR 6000. |                                                                                             |                                                                                        |

|                   |                                     |                                     |                  |                   |       |
|-------------------|-------------------------------------|-------------------------------------|------------------|-------------------|-------|
| D-ATIS<br>128.375 | KANSAS CITY APP CON<br>120.95 318.1 | INTERNATIONAL TOWER<br>128.2 254.25 | GND CON<br>121.8 | CLNC DEL<br>135.7 | CPDLC |
|-------------------|-------------------------------------|-------------------------------------|------------------|-------------------|-------|

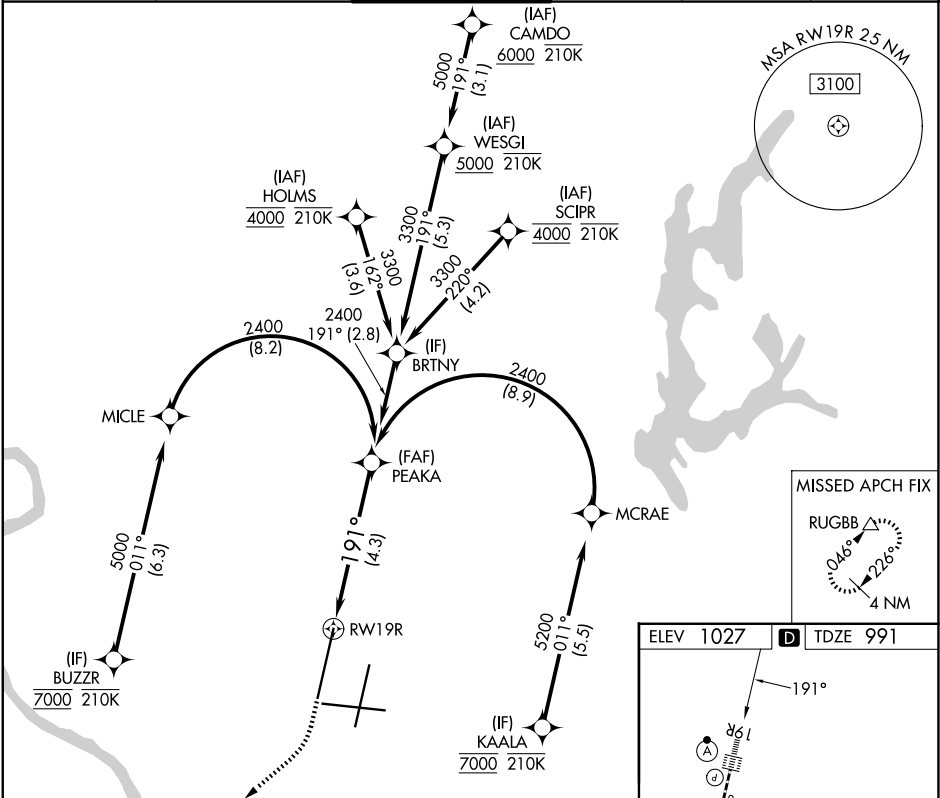

|                                                                                    |                                                                                    |                                                                                     |                                                                     |       |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|-------|
| 2000                                                                               | 4000                                                                               | RUGBB                                                                               | See planview for multiple IF locations.                             | PEAKA |
|   |  |  | VGSI and RNAV glidepath not coincident<br>(VGSI Angle 3.00/TCH 74). | 2400  |
|  |                                                                                    |                                                                                     |                                                                     |       |
| GP 3.00°<br>TCH 55                                                                 |                                                                                    |                                                                                     |                                                                     |       |
| CATEGORY                                                                           | A                                                                                  | B                                                                                   | C                                                                   | D     |
| RNP 0.15 DA                                                                        | 1287/24 296 (300-½)                                                                |                                                                                     |                                                                     |       |
| RNP 0.30 DA                                                                        | 1405/40 414 (400-¾)                                                                |                                                                                     |                                                                     |       |
| AUTHORIZATION REQUIRED                                                             |                                                                                    |                                                                                     |                                                                     |       |

