
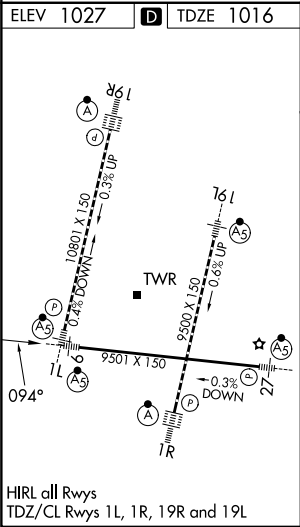




APP CRS	Rwy Ldg	9501
094°	TDZE	1016
	Apt Elev	1027

RNAV (RNP) Z RWY 9

KANSAS CITY INTL (MCI)

RNP AR APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 4000 direct DUSTN and on track 092° LYMES and hold.		
▼ For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 4500; increase RNP 0.30 all Cats visibility to RVR 6000.						
D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8	CLNC DEL 135.7	CPDLC	

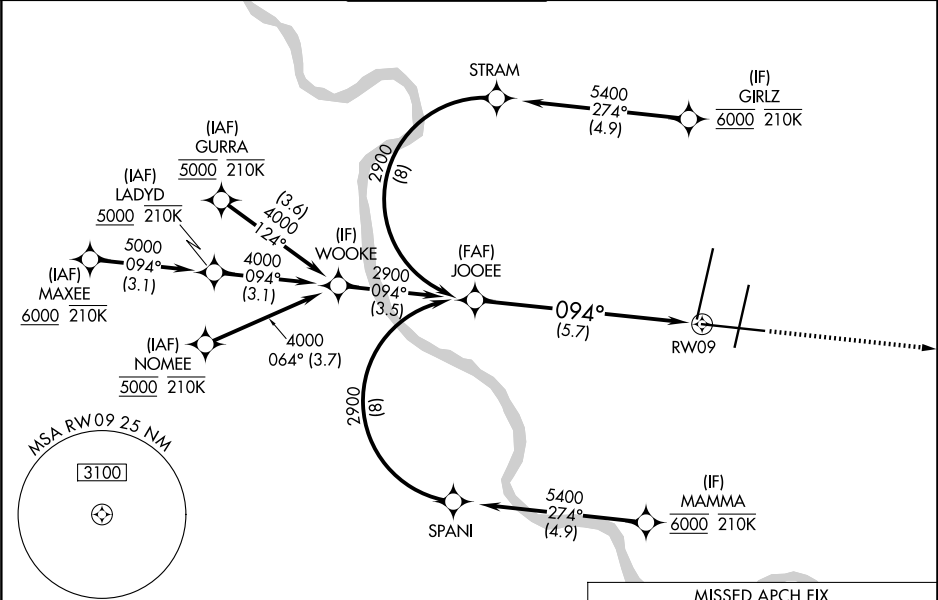

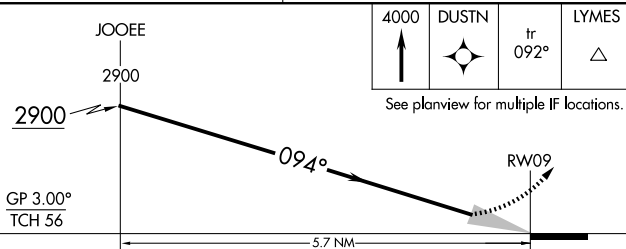				
(not to scale)				
				
See planview for multiple IF locations.				
				
CATEGORY	A	B	C	D
RNP 0.20 DA	1319/24 303 (300-½)			
RNP 0.30 DA	1418/40 402 (400-¾)			
AUTHORIZATION REQUIRED				