

WAAS CH 56608 W09A	APP CRS 094°	Rwy Ldg 9501 TDZE 1016 Apt Elev 1027
--	------------------------	---

RNAV (GPS) Y RWY 9
KANSAS CITY INTL (MCI)

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LPV all Cats and LNAV/VNAV all Cats visibility to RVR 4500, and increase LNAV Cats C/D visibility to 1 $\frac{3}{8}$ SM.

MALSR



MISSED APPROACH: Climb to 4000 direct
DUSTN and on track 092° to LYMES and hold.

D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8	CLNC DEL 135.7	CPDLC
--------------------------	--	--	-------------------------	--------------------------	-------

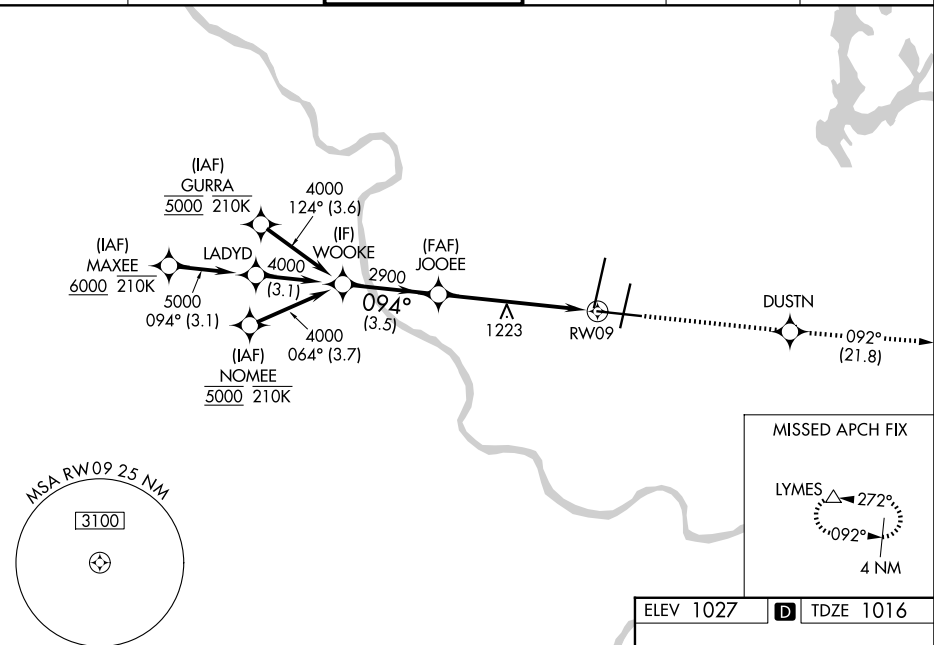

WOOKE

4000

094°

2900

3.5 NM

4.5 NM

1.3 NM to RW09

RW09

GP 3.00°
TCH 56

4000

DUSTN

fr 092°

LYMES

△

CATEGORY	A	B	C	D
LPV DA	1316/40 300 (300-¾)			
LNAP/ VNAV	1319/40 303 (300-¾)			
LNAP MDA	1480/24 464 (500-½)		1480/50 464 (500-1)	
CIRCLING	1540-1 513 (600-1)		1540-1½ 513 (600-1½)	1580-2 553 (600-2)

