

WAAS CH 87007 W33A	APP CRS 326°	Rwy Ldg TDZE Apt Elev	5006 2193 2193
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 33

ONTARIO MUNI (ONO)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. Baro-VNAV and VDP NA when using Caldwell altimeter setting. When local altimeter setting not received, use Caldwell altimeter setting and increase all DA to 2541 feet and increase LPV and LNAV/VNAV visibility ¾ SM all Cats; increase all MDA 100 feet and increase LNAV Cat C and D ¾ SM and Circling Cat C visibility ¼ SM. Circling Rwy 15 NA at night. Rwy 33 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 9000 direct ZEMTI and on track 327° to HOVEL and hold, continue climb-in-hold 9000.

ASOS 135.275	SALT LAKE CENTER 128.05 306.95	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

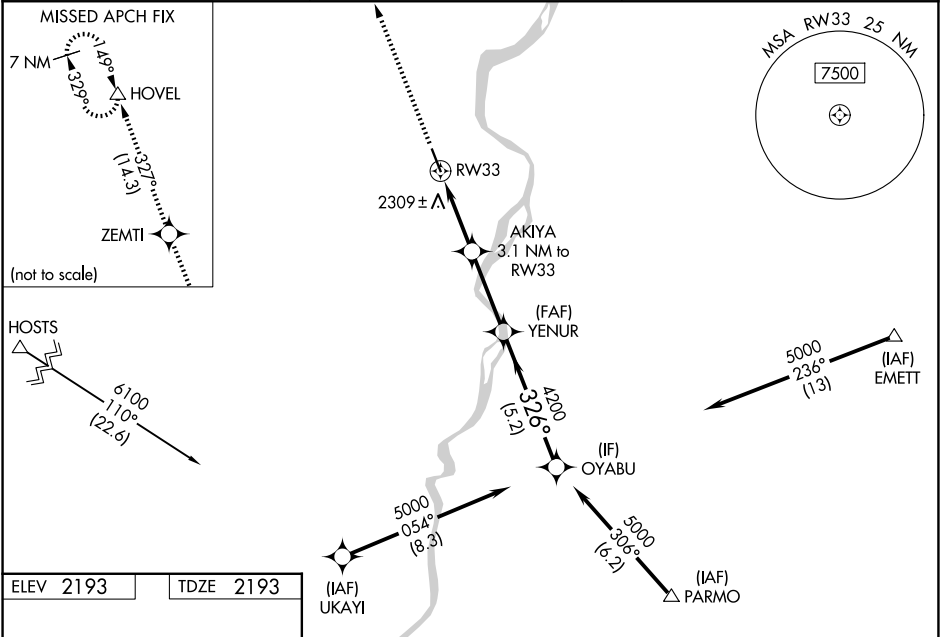

ELEV 2193	TDZE 2193
MRL Rwy 15-33 0	
REIL Rwy 15 and 33 0	
326°	
9000	
ZEMTI	HOVEL
tr	327°
*LNAV only	
AKIYA 3.1 NM to RW33	
*1 NM to RW33	
RW33	
3200*	
YENUR 4200	
OYABU 5000	
GP 3.00°	
TCH 40	
1 NM 2.1 NM 3.1 NM 5.2 NM	
CATEGORY	A B C D
LPV DA	2443-7/8 250 (300-7/8)
LNAV/VNAV DA	2443-7/8 250 (300-7/8)
LNAV MDA	2560-1 367 (400-1)
CIRCLING	2760-1 567 (600-1) 2800-1 607 (700-1) 3120-2¾ 927 (1000-2¾) 3240-3 1047 (1100-3)

NW-1, 03 SEP 2026 to 01 OCT 2026

NW-1, 03 SEP 2026 to 01 OCT 2026