

LOC I-UIIN <u>110.1</u>	APP CRS 038°	Rwy Ldg TDZE Apt Elev	7098 763 768
-----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 4
QUINCY RGNL-BALDWIN FLD (UIN)

ADF required.

RADAR required for procedure entry at RAYOK.


V **NA** DME from UIN TACAN. DME use requires simultaneous reception of I-UIN and UIN TACAN. When local altimeter setting not received, use Pittsfield altimeter setting and increase S-LSL 04 DA to 1033 feet; increase all MDAs 80 feet and S-LOC 04 visibility Cat C/D ¾ SM. For inop ALS when local altimeter not received, increase S-LSL 4 all Cats visibility to ¾ SM and S-LOC 4 Cat C and D visibility to 1 ¾ SM.

MALSR





MISSED APPROACH: Climb to 1800 then climbing right turn to 2300 direct QUINCY LOM and hold.

ASOS 121,425	KANSAS CITY CENTER 126,225 317,775	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

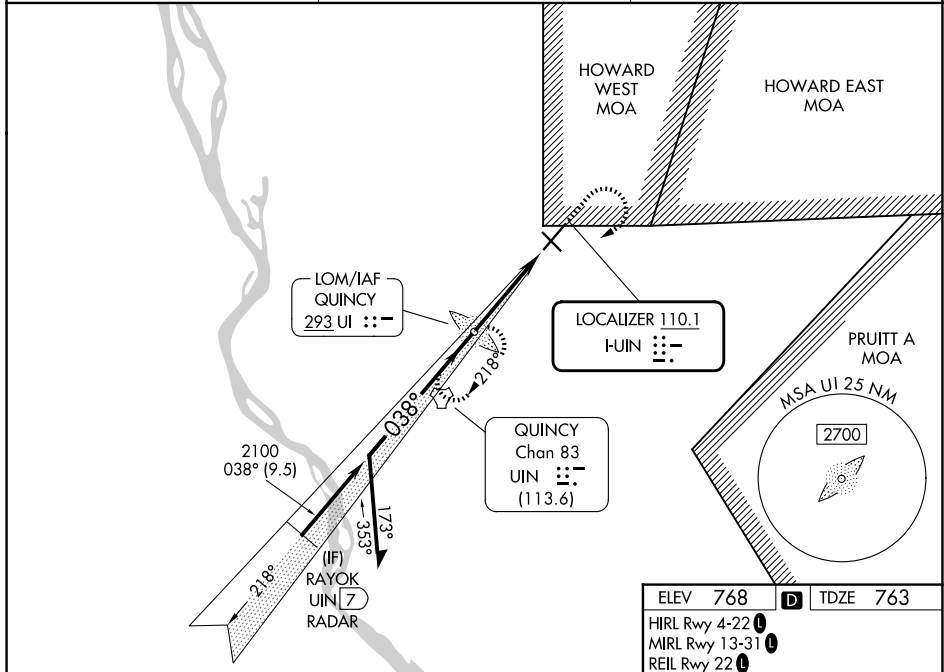

ELEV 768	D	TDZE 763
HIRL Rwy 4-22 L MIRL Rwy 13-31 L REIL Rwy 22 L		

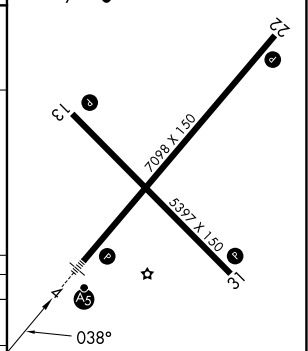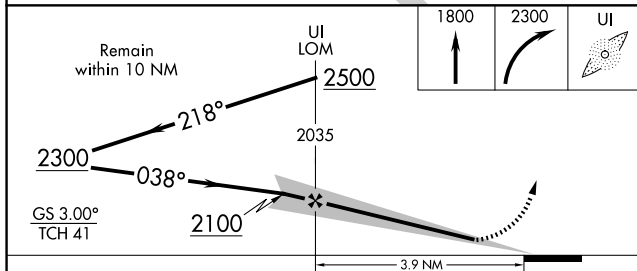

CATEGORY	A	B	C	D
S-ILS 4	963- $\frac{1}{2}$ 200 (200- $\frac{1}{2}$)			
S-LOC 4	1160- $\frac{1}{2}$ 397 (400- $\frac{1}{2}$)		1160- $\frac{5}{8}$ 397 (400- $\frac{5}{8}$)	
CIRCLING	1180-1 412 (500-1)	1220-1 452 (500-1)	1240-1 $\frac{1}{2}$ 472 (500-1 $\frac{1}{2}$)	1320-2 552 (600-2)

FAF to MAP 3.9 NM					
Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18