

LOC I-UIIN 110.1	APP CRS 218°	Rwy Ldg TDZE Apt Elev	7098 753 768
----------------------------	------------------------	-----------------------------	---


LOC BC RWY 22
QUINCY RGNL-BALDWIN FLD (UIIN)

RADAR required for procedure entry at MALGA. RNP APCH - GPS.

VDP NA when using Pittsfield altimeter setting. When local altimeter setting not received, use Pittsfield altimeter setting and increase all MDAs 80 feet and S-22 visibility Cat C/D 1/8 SM. DME from UIIN TACAN. DME use requires simultaneous reception of I-UIIN and UIIN DME.

MISSED APPROACH: Climb to 1200 then climbing left turn to 2400 direct FANUT and hold.

ASOS 121.425	KANSAS CITY CENTER 126.225 317.775	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

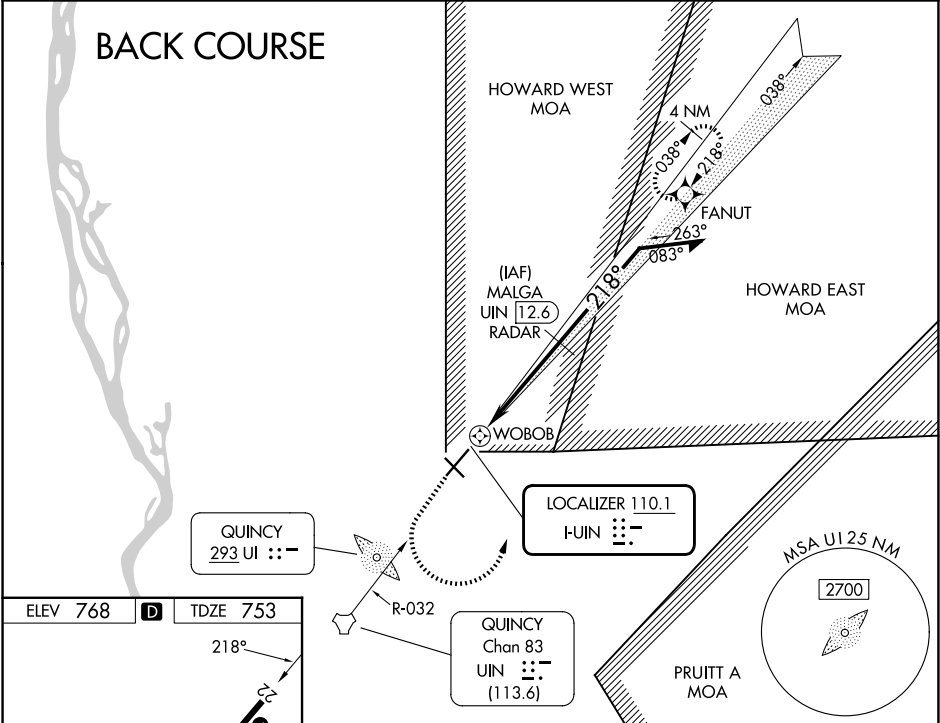

HIRL Rwy 4-22
MIRL Rwy 13-31
REIL Rwy 22

FAF to MAP 4.4 NM

FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

1200 2400 FANUT

↑

WOBBO

UIIN 8.8

MALGA UIIN 12.6

RADAR

038°

218° 2400

2400

Disregard GS indications.

≤ 3.00°

TCH 46

0.7 0.6 3.8 NM

CATEGORY	A	B	C	D
S-22	1180-1	427 (500-1)	1180-1¼	427 (500-1¼)
CIRCLING	1180-1 412 (500-1)	1220-1 452 (500-1)	1240-1½ 472 (500-1½)	1320-2 552 (600-2)

EC-3, 03 SEP 2026 to 01 OCT 2026

EC-3, 03 SEP 2026 to 01 OCT 2026